



KlassikDrain - Type 630Q/631Q Mesh Stainless Steel Grates




Top (630Q)

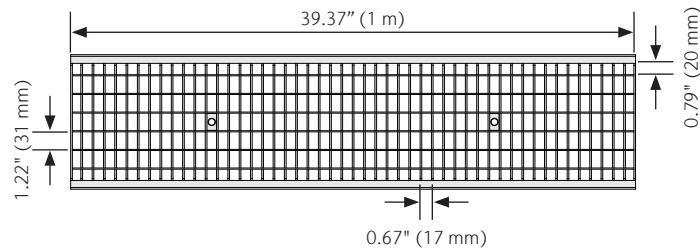


Side (630Q)



Front



Top (631Q)

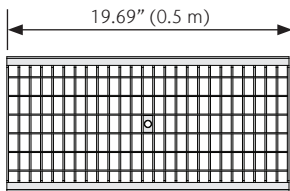

Specifications

General

The surface drainage system shall be ACO Drain K200, KS200, and H200K-13 channels, complete with ACO Type 630Q/631Q mesh stainless steel grate with QuickLok locking as manufactured by ACO, Inc. or similar approved.

Materials

The covers shall be manufactured from stainless steel and have minimum properties as follows:

- Independently certified to meet Load Class C to EN 1433 - 56,000 lbs - 967 psi
- Grade 304 stainless steel
- Intake area of 128.0 in² (825.8 cm²) per half meter of grate and 256.0 in² (1,651.6 cm²) per meter of grate


630Q: Overall width of 9.37" (238 mm) and overall length of 39.37" (1 m). Slots measure at 1.22" (31 mm) by 0.67" (17 mm).

631Q: Overall width of 9.37" (238 mm) and overall length of 19.69" (500 mm). Slots measure at 1.22" (31 mm) by 0.67" (17 mm).

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

QuickLok® Locking Mechanism



Channel



Grate



QuickLok Locking Stud



QuickLok Locking Spring



QuickLok Locking Bar

ACO QuickLok is a patented, boltless locking system which allows grates to be removed and replaced with minimum time and effort for ease of maintenance. The unique design allows the grate to snap down and fit into the locking bar. A stud is fixed to the grate which locks into the spring clip in the locking bar.

The QuickLok bar and clip are made from stainless steel, while the stud is made from stainless steel and high-density nylon. ACO QuickLok is for use in both general purpose and corrosive environments.

Product Features

- Certified to EN 1433 Load Class C - 56,000 lbs - 967 psi
- Uses QuickLok boltless locking system
- Suitable for use with K200, KS200, and H200K-13 channels
- Manufactured from 304 stainless steel
- Bicycle Tire Penetration Resistant to AS 3996 - 2006

	Part #	Length in (m)	Width in (mm)	Weight lbs
Type 630Q Mesh Stainless Steel Grate	16032	39.37 (1)	9.37 (238)	28.0
Type 631Q Mesh Stainless Steel Grate	16033	19.69 (0.5)	9.37 (238)	14.0
QuickLok Locking Bar - 8" System	10457	-	-	0.5
Grate Removal Tool	01318	-	-	0.3

ACO, Inc.

West Sales Office
825 W. Beechcraft Street
Casa Grande, AZ 85122
Tel: (520) 421-9988
Toll-Free: (888) 490-9552
Fax: (520) 421-9899

Northeast Sales Office
9470 Pinecone Drive
Mentor, OH 44060
Tel: (440) 639-7230
Toll-Free: (800) 543-4764
Fax: (440) 639-7235

Southeast Sales Office
4211 Pleasant Road
Fort Mill, SC 29708
Toll-Free: (800) 543-4764
Fax: (803) 802-1063

info@acousa.com
www.acousa.com

© October 2020 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.

ACO. creating
the future of drainage

