




Surface Water Management

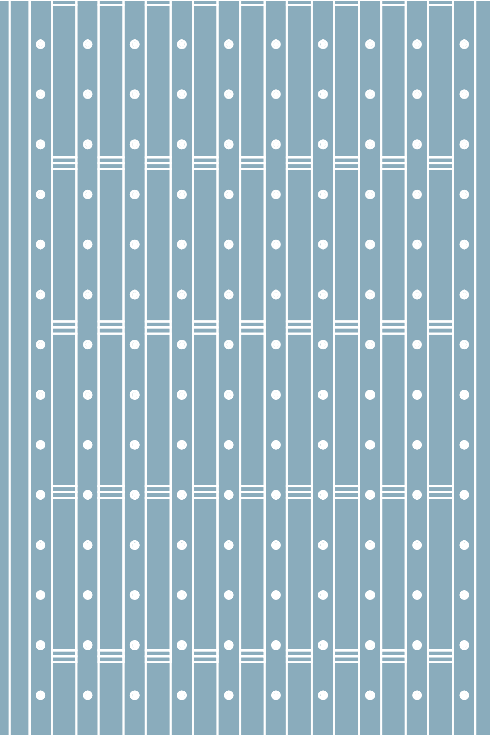

2021

Standard Products
Drain Price List
1 of 5

ACO Drain













Effective June 1, 2021

	K100 Galvanized Edge				KS100 Stainless Edge			
	Part No.	Price \$	Weight lbs	Pallet Qty	Part No.	Price \$	Weight lbs	
K100 Channel - 39.37" (1 m) 	K1-00 Constant depth channel - 39.37" (1 m) ¹	74041	130.50	28.1	40	74441	249.00	28.1
	K1-1 Sloped channel - 39.37" (1 m)	74001	130.50	28.1	40	74401	249.00	28.1
	K1-2 Sloped channel - 39.37" (1 m)	74002	130.50	28.9	40	74402	249.00	28.9
	K1-3 Sloped channel - 39.37" (1 m)	74003	130.50	29.7	40	74403	249.00	29.7
	K1-4 Sloped channel - 39.37" (1 m)	74004	130.50	30.5	40	74404	249.00	30.5
	K1-5 Sloped channel - 39.37" (1 m) ¹	74005	130.50	31.3	40	74405	249.00	31.3
	K1-6 Sloped channel - 39.37" (1 m)	74006	130.50	32.1	40	74406	249.00	32.1
	K1-7 Sloped channel - 39.37" (1 m)	74007	130.50	32.9	40	74407	249.00	32.9
	K1-8 Sloped channel - 39.37" (1 m)	74008	130.50	33.7	40	74408	249.00	33.7
	K1-9 Sloped channel - 39.37" (1 m)	74009	130.50	34.5	40	74409	249.00	34.5
	K1-10 Sloped channel - 39.37" (1 m) ¹	74010	130.50	35.3	40	74410	249.00	35.3
K100 Channel - 19.69" (0.5 m) 	K1-010 Constant depth channel - 39.37" (1 m) ¹	74043	130.50	35.3	40	74443	249.00	35.3
	K1-0103 Constant depth channel - 19.69" (0.5 m) ¹	74044	87.75	17.0	80	74444	171.75	17.0
	K1-11 Sloped channel - 39.37" (1 m)	74011	130.50	36.1	32	74411	249.00	36.1
	K1-12 Sloped channel - 39.37" (1 m)	74012	130.50	36.9	32	74412	249.00	36.9
	K1-13 Sloped channel - 39.37" (1 m)	74013	130.50	37.7	32	74413	249.00	37.7
	K1-14 Sloped channel - 39.37" (1 m)	74014	130.50	38.5	32	74414	249.00	38.5
	K1-15 Sloped channel - 39.37" (1 m) ¹	74015	130.50	39.3	32	74415	249.00	39.3
	K1-16 Sloped channel - 39.37" (1 m)	74016	130.50	40.1	32	74416	249.00	40.1
	K1-17 Sloped channel - 39.37" (1 m)	74017	130.50	40.9	32	74417	249.00	40.9
	K1-18 Sloped channel - 39.37" (1 m)	74018	130.50	41.7	32	74418	249.00	41.7
	K1-19 Sloped channel - 39.37" (1 m)	74019	130.50	42.5	32	74419	249.00	42.5
K1-901 In-line Catch Basin 	K1-20 Sloped channel - 39.37" (1 m) ¹	74020	130.50	43.4	32	74420	249.00	43.4
	K1-020 Constant depth channel - 39.37" (1 m) ¹	74045	130.50	43.4	32	74445	249.00	43.4
	K1-0203 Constant depth channel - 19.69" (0.5 m) ¹	74046	87.75	20.5	64	74446	171.75	20.5
	K1-21 Sloped channel - 39.37" (1 m)	74021	130.50	44.2	32	74421	249.00	44.2
	K1-22 Sloped channel - 39.37" (1 m)	74022	130.50	45.0	32	74422	249.00	45.0
	K1-23 Sloped channel - 39.37" (1 m)	74023	130.50	45.8	32	74423	249.00	45.8
	K1-24 Sloped channel - 39.37" (1 m)	74024	130.50	46.6	32	74424	249.00	46.6
	K1-25 Sloped channel - 39.37" (1 m) ¹	74025	130.50	47.4	32	74425	249.00	47.4
	K1-26 Sloped channel - 39.37" (1 m)	74026	130.50	48.2	32	74426	249.00	48.2
	K1-27 Sloped channel - 39.37" (1 m)	74027	130.50	49.0	32	74427	249.00	49.0
	K1-28 Sloped channel - 39.37" (1 m)	74028	130.50	49.8	32	74428	249.00	49.8
K1-621 Style Catch Basin 	K1-29 Sloped channel - 39.37" (1 m)	74029	130.50	50.6	32	74429	249.00	50.6
	K1-30 Sloped channel - 39.37" (1 m) ¹	74030	130.50	51.4	32	74430	249.00	51.4
	K1-030 Constant depth channel - 39.37" (1 m) ¹	74047	130.50	51.4	32	74447	249.00	51.4
	K1-0303 Constant depth channel - 19.69" (0.5 m) ¹	74048	87.75	24.0	64	74448	171.75	24.0
	K1-31 Sloped channel - 39.37" (1 m)	74031	130.50	52.2	32	74431	249.00	52.2
	K1-32 Sloped channel - 39.37" (1 m)	74032	130.50	53.0	32	74432	249.00	53.0
	K1-33 Sloped channel - 39.37" (1 m)	74033	130.50	53.8	32	74433	249.00	53.8
	K1-34 Sloped channel - 39.37" (1 m)	74034	130.50	54.6	32	74434	249.00	54.6
	K1-35 Sloped channel - 39.37" (1 m) ¹	74035	130.50	55.4	32	74435	249.00	55.4
	K1-36 Sloped channel - 39.37" (1 m)	74036	130.50	56.2	32	74436	249.00	56.2
	K1-37 Sloped channel - 39.37" (1 m)	74037	130.50	57.0	32	74437	249.00	57.0
	K1-38 Sloped channel - 39.37" (1 m)	74038	130.50	57.9	32	74438	249.00	57.9
	K1-39 Sloped channel - 39.37" (1 m)	74039	130.50	58.7	32	74439	249.00	58.7
	K1-40 Sloped channel - 39.37" (1 m) ¹	74040	130.50	59.5	32	74440	249.00	59.5
	K1-040 Constant depth channel - 39.37" (1 m) ¹	74049	130.50	59.5	32	74449	249.00	59.5
	K1-0403 Constant depth channel - 19.69" (0.5 m) ¹	74050	87.75	27.5	64	74450	171.75	27.5
	K1-901G/901S In-line catch basin - 19.69" (0.5 m) ^{2,4}	94608	403.25	52.6	6	94609	451.50	52.6
	K1-621G/621S Catch basin - 19.69" (0.5 m) ^{2,4}	94617	633.75	55.8	6	94618	662.50	55.8
	K1-631G/631S Catch basin - 19.69" (0.5 m) ^{3,4}	94631	789.25	65.8	6	94632	800.75	65.8
	Series 600 catch basin riser (optional)	99902	173.00	10.0	24	99902	173.00	10.0
	Foul air trap - fits Type 900 & 600 basins	90854	72.75	1.2	-	90854	72.75	1.2
	K1-304-6 6" Inlet end cap	96839	67.00	5.2	-	96844	71.50	5.2
K1-308-6 6" Outlet end cap	96840	67.00	5.0	-	96845	71.50	5.0	
K1-404-6 6" Inlet end cap	96834	67.00	6.0	-	96846	71.50	6.0	
K1-408-6 6" Outlet end cap	96836	67.00	5.8	-	96847	71.50	5.8	
K1 Universal inlet/outlet/end cap	96822	17.50	0.4	-	96822	17.50	0.4	
Debris strainer for 4" bottom knockout	93488	52.00	0.2	-	93488	52.00	0.2	
Outlet adapter - 4" oval to 6" round	95140	21.00	1.1	-	95140	21.00	1.1	
Installation device - 4" system	97477	29.19	2.8	-	97477	29.19	2.8	
Grate removal tool	01318	29.19	0.3	-	01318	29.19	0.3	
QuickLok® locking bar - 4" system	02899	9.45	0.1	-	02899	9.45	0.1	






Notes

1. This channel features 4" & 6" bottom knockouts.
2. Catch basin assembly: Polymer concrete top, blanking end kit, trash bucket and plastic base. Select grate (and locking bar) to suit.
3. Catch basin assembly: Polymer concrete top, blanking end kit, deep trash bucket, riser and plastic base. Select grate (and locking bar) to suit.
4. For channels and 901 catch basin - see K100 grates on page 2. For 621/631 catch basin - see K300 grate options on pages 6-7.

DrainLok K100/KS100 Grates

		Length in (mm)	Part No.	Price \$	Weight lbs	Pallet Qty
LOAD CLASS A - EN 1433 - 3,372 LBS - 116 PSI						
	Type 410D Galvanized perforated	39.37 (1000)	12666	60.00	6.3	200
	Type 412D Galvanized perforated	19.69 (500)	12667	44.00	3.2	400
	Type 451D Stainless perforated	39.37 (1000)	12664	203.00	6.3	200
	Type 453D Stainless perforated	19.69 (500)	12665	135.00	3.2	400
	Type 420D Galvanized slotted	39.37 (1000)	12610	38.25	5.9	200
	Type 421D Galvanized slotted	19.69 (500)	12611	25.67	3.0	400
	Type 450D Stainless slotted	39.37 (1000)	12640	178.75	5.9	200
	Type 452D Stainless slotted	19.69 (500)	12641	120.00	3.0	400
	Type 494D Black plastic longitudinal	19.69 (500)	99575	45.25	1.8	400
	Type 495D Gray plastic longitudinal	19.69 (500)	99576	45.25	1.8	400
	Type 496D Tan plastic longitudinal	19.69 (500)	99577	45.25	1.8	400
LOAD CLASS B - EN 1433 - 28,101 LBS - 967 PSI						
	Type 447D Stainless longitudinal	39.37 (1000)	142215	703.00	8.0	200
	Type 448D Stainless longitudinal	19.69 (500)	142216	497.75	4.0	-
	Type 438D Galvanized longitudinal	39.37 (1000)	132555	101.75	8.0	50
	Type 437D Galvanized longitudinal	19.69 (500)	132550	56.50	4.0	25
LOAD CLASS C - EN 1433 - 56,202 LBS - 1,934 PSI						
	Type 492D Black composite microgrip slotted	19.69 (500)	132720	56.50	2.2	50
	Type 425D Galvanized slotted	39.37 (1000)	12614	93.75	10.0	200
	Type 426D Galvanized slotted	19.69 (500)	12615	56.50	5.0	400
	Type 455D Stainless slotted	39.37 (1000)	12644	381.50	10.0	200
	Type 457D Stainless slotted	19.69 (500)	12645	193.50	5.0	400
	Type 411D Galvanized perforated	39.37 (1000)	12656	132.50	10.0	200
	Type 413D Galvanized perforated	19.69 (500)	12657	71.50	5.0	400
	Type 465D Stainless perforated	39.37 (1000)	12654	381.50	10.0	200
	Type 466D Stainless perforated	19.69 (500)	12655	195.00	5.0	400
	Type 405D Galvanized mesh	39.37 (1000)	132880	127.00	9.1	100
	Type 406D Galvanized mesh	19.69 (500)	132881	99.25	4.6	100
	Type 430D Stainless mesh	39.37 (1000)	132882	535.75	9.2	100
	Type 431D Stainless mesh	19.69 (500)	132883	385.00	4.6	100
	Type 460D Ductile iron slotted	19.69 (500)	12670	53.25	8.0	200
	Type 476D Ductile iron longitudinal	19.69 (500)	142171	79.75	8.4	200
	Type 480D Ductile iron wave	19.69 (500)	99578	86.75	8.0	160

QuickLok® K100/KS100 Grates


LOAD CLASS C - EN 1433 - 56,202 LBS - 1,934 PSI						
	Type 492Q Black plastic slotted	19.69 (500)	31710	54.50	3.5	204
	Type 479Q Ductile iron mosaic	19.69 (500)	97116	69.50	9.6	200
LOAD CLASS E - EN 1433 - 134,885 LBS - 4,641 PSI						
	Type 435Q Galvanized slotted	39.37 (1000)	31550	138.50	13.7	200
	Type 436Q Galvanized slotted	19.69 (500)	31551	88.75	6.8	400
	Type 490Q Stainless slotted	39.37 (1000)	31650	443.50	13.7	200
	Type 493Q Stainless slotted	19.69 (500)	31651	266.25	6.8	400
	Type 478Q Ductile iron longitudinal	19.69 (500)	03314	74.00	13.3	200
	Type 461Q Ductile iron slotted	19.69 (500)	96752	61.50	10.5	200

	K200 Galvanized Edge				KS200 Stainless Edge			
	Part No.	Price \$	Weight lbs	Pallet Qty	Part No.	Price \$	Weight lbs	
K200 Channel - 39.37" (1 m) 	K2-00 Constant depth channel - 39.37" (1 m) ¹	75041	225.75	83.6	16	75441	455.00	83.6
	K2-1 Sloped channel - 39.37" (1 m)	75001	225.75	83.6	16	75401	455.00	83.6
	K2-2 Sloped channel - 39.37" (1 m)	75002	225.75	84.7	16	75402	455.00	84.7
	K2-3 Sloped channel - 39.37" (1 m)	75003	225.75	85.8	16	75403	455.00	85.8
	K2-4 Sloped channel - 39.37" (1 m)	75004	225.75	86.9	16	75404	455.00	86.9
	K2-5 Sloped channel - 39.37" (1 m) ¹	75005	225.75	88.0	16	75405	455.00	88.0
	K2-6 Sloped channel - 39.37" (1 m)	75006	225.75	89.1	16	75406	455.00	89.1
	K2-7 Sloped channel - 39.37" (1 m)	75007	225.75	90.2	16	75407	455.00	90.2
	K2-8 Sloped channel - 39.37" (1 m)	75008	225.75	91.3	16	75408	455.00	91.3
	K2-9 Sloped channel - 39.37" (1 m)	75009	225.75	92.4	16	75409	455.00	92.4
	K2-10 Sloped channel - 39.37" (1 m) ¹	75010	225.75	93.5	16	75410	455.00	93.5
K200 Channel - 19.69" (0.5 m) 	K2-010 Constant depth channel - 39.37" (1 m) ¹	75043	225.75	93.5	16	75443	455.00	93.5
	K2-0103 Constant depth channel - 19.69" (0.5 m) ¹	75044	150.00	56.0	24	75444	306.50	56.0
	K2-11 Sloped channel - 39.37" (1 m)	75011	225.75	94.6	12	75411	455.00	94.6
	K2-12 Sloped channel - 39.37" (1 m)	75012	225.75	95.7	12	75412	455.00	95.7
	K2-13 Sloped channel - 39.37" (1 m)	75013	225.75	96.8	12	75413	455.00	96.8
	K2-14 Sloped channel - 39.37" (1 m)	75014	225.75	97.9	12	75414	455.00	97.9
	K2-15 Sloped channel - 39.37" (1 m) ¹	75015	225.75	99.0	12	75415	455.00	99.0
	K2-16 Sloped channel - 39.37" (1 m)	75016	225.75	100.1	12	75416	455.00	100.1
	K2-17 Sloped channel - 39.37" (1 m)	75017	225.75	101.2	12	75417	455.00	101.2
	K2-18 Sloped channel - 39.37" (1 m)	75018	225.75	102.3	12	75418	455.00	102.3
	K2-19 Sloped channel - 39.37" (1 m)	75019	225.75	103.4	12	75419	455.00	103.4
K1-902 In-line Catch Basin 	K2-20 Sloped channel - 39.37" (1 m) ¹	75020	225.75	104.5	12	75420	455.00	104.5
	K2-020 Constant depth channel - 39.37" (1 m) ¹	75045	225.75	104.5	12	75445	455.00	104.5
	K2-0203 Constant depth channel - 19.69" (0.5 m) ¹	75046	150.00	64.0	24	75446	306.50	64.0
	K2-21 Sloped channel - 39.37" (1 m)	75021	225.75	105.6	12	75421	455.00	105.6
	K2-22 Sloped channel - 39.37" (1 m)	75022	225.75	106.7	12	75422	455.00	106.7
	K2-23 Sloped channel - 39.37" (1 m)	75023	225.75	107.8	12	75423	455.00	107.8
	K2-24 Sloped channel - 39.37" (1 m)	75024	225.75	108.9	12	75424	455.00	108.9
	K2-25 Sloped channel - 39.37" (1 m) ¹	75025	225.75	110.0	12	75425	455.00	110.0
	K2-26 Sloped channel - 39.37" (1 m)	75026	225.75	111.1	12	75426	455.00	111.1
	K2-27 Sloped channel - 39.37" (1 m)	75027	225.75	112.2	12	75427	455.00	112.2
	K2-28 Sloped channel - 39.37" (1 m)	75028	225.75	113.3	12	75428	455.00	113.3
K2-631 Style Catch Basin 	K2-29 Sloped channel - 39.37" (1 m)	75029	225.75	114.4	12	75429	455.00	114.4
	K2-30 Sloped channel - 39.37" (1 m) ¹	75030	225.75	115.5	12	75430	455.00	115.5
	K2-030 Constant depth channel - 39.37" (1 m) ¹	75047	225.75	115.5	12	75447	455.00	115.5
	K2-0303 Constant depth channel - 19.69" (0.5 m) ¹	75048	150.00	68.0	24	75448	306.50	68.0
	K2-31 Sloped channel - 39.37" (1 m)	75031	225.75	116.6	12	75431	455.00	116.6
	K2-32 Sloped channel - 39.37" (1 m)	75032	225.75	117.7	12	75432	455.00	117.7
	K2-33 Sloped channel - 39.37" (1 m)	75033	225.75	118.8	12	75433	455.00	118.8
	K2-34 Sloped channel - 39.37" (1 m)	75034	225.75	119.9	12	75434	455.00	119.9
	K2-35 Sloped channel - 39.37" (1 m) ¹	75035	225.75	121.0	12	75435	455.00	121.0
	K2-36 Sloped channel - 39.37" (1 m)	75036	225.75	122.1	12	75436	455.00	122.1
	K2-37 Sloped channel - 39.37" (1 m)	75037	225.75	123.2	12	75437	455.00	123.2
	K2-38 Sloped channel - 39.37" (1 m)	75038	225.75	124.3	12	75438	455.00	124.3
	K2-39 Sloped channel - 39.37" (1 m)	75039	225.75	125.4	12	75439	455.00	125.4
	K2-40 Sloped channel - 39.37" (1 m) ¹	75040	225.75	126.5	12	75440	455.00	126.5
	K2-040 Constant depth channel - 39.37" (1 m) ¹	75049	225.75	126.5	12	75449	455.00	126.5
	K2-0403 Constant depth channel - 19.69" (0.5 m) ¹	75050	150.00	77.0	12	75450	306.50	77.0
	K2-902G/902S In-line catch basin - 19.69" (0.5 m) ^{2,4}	94611	549.75	68.0	6	94612	582.00	68.0
	K2-621G/621S Catch basin - 19.69" (0.5 m) ^{2,4}	94620	690.25	91.0	6	94621	720.00	91.0
	K2-631G/631S Catch basin - 19.69" (0.5 m) ^{3,4}	94633	823.75	101.0	6	94634	835.50	101.0
	Series 600 catch basin riser (optional)	99902	173.00	10.0	24	99902	173.00	10.0
	Foul air trap - fits Type 900 & 600 basins	90854	72.75	1.2	-	90854	72.75	1.2
	K2 Universal inlet/outlet/end cap	96821	56.50	1.4	-	96821	56.50	1.4
Debris strainer for 4" bottom knockout	93488	52.00	0.2	-	93488	52.00	0.2	
Installation device - 8" system	97478	30.25	4.0	-	97478	30.25	4.0	
Grate removal tool	01318	29.19	0.3	-	01318	29.19	0.3	
QuickLok® locking bar - 8" system	10457	23.24	0.5	-	10457	23.24	0.5	

Notes

1. This channel features 4" & 6" bottom knockouts.
2. Catch basin assembly: Polymer concrete top, blanking end kit, trash bucket and plastic base. Select grate (and locking bar unit) to suit.
3. Catch basin assembly: Polymer concrete top, blanking end kit, deep trash bucket, riser and plastic base. Select grate (and locking bar) to suit.
4. For channels and 902 catch basin - see K200 grates on page 4. For 621/631 catch basin see K300 grate options on pages 6-7.

DrainLok K200/KS200 Grates


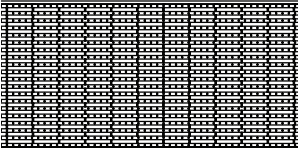
	Length in (mm)	Part No.	Price \$	Weight lbs	Pallet Qty
LOAD CLASS B - EN 1433 - 28,101 LBS - 483 PSI					
	39.37 (1000)	142219	1,356.00	18.0	100
Type 648D Stainless longitudinal	19.69 (500)	142220	911.25	9.0	100

LOAD CLASS C - EN 1433 - 56,202 LBS - 967 PSI


	19.69 (500)	142177	137.25	19.0	80
Type 676D Ductile iron longitudinal	19.69 (500)	142173	142.00	19.0	80
	19.69 (500)	99579	173.00	27.0	80

QuickLok® K200/KS200 Grates

LOAD CLASS C - EN 1433 - 56,202 LBS - 967 PSI

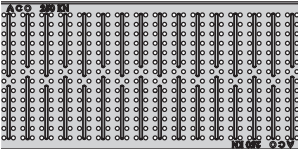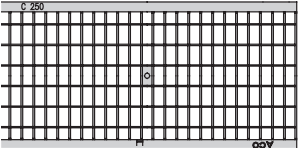
	39.37 (1000)	98962	\$333.00	28.0	80
Type 613Q Galvanized perforated	19.69 (500)	98961	\$264.00	14.0	80
Type 665Q Stainless perforated	39.37 (1000)	98960	\$963.00	28.0	80
Type 666Q Stainless perforated	19.69 (500)	98959	\$638.50	14.0	80
	39.37 (1000)	10352	\$458.50	30.0	100
Type 606Q Galvanized mesh	19.69 (500)	10353	\$265.00	15.0	100
Type 630Q Stainless mesh	39.37 (1000)	16032	1,434.25	28.0	100
Type 631Q Stainless mesh	19.69 (500)	16033	924.00	14.0	100

LOAD CLASS E - EN 1433 - 134,885 LBS - 2,321 PSI

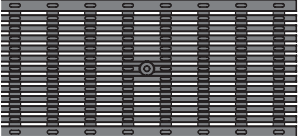
	19.69 (500)	138129	213.25	26.0	80
Type 661Q Ductile iron slotted	19.69 (500)	10351	206.50	37.0	48

	K300 Galvanized Edge				KS300 Stainless Edge			
	Part No.	Price \$	Weight lbs	Pallet Qty	Part No.	Price \$	Weight lbs	
KlassikDrain K300/KS300 Parts Table	K3-00 Constant depth channel - 39.37" (1 m) ¹	76041	356.25	132.6	9	76441	526.50	132.6
	K3-1 Sloped channel - 39.37" (1 m)	76001	356.25	132.6	9	76401	526.50	132.6
	K3-2 Sloped channel - 39.37" (1 m)	76002	356.25	133.8	9	76402	526.50	133.8
	K3-3 Sloped channel - 39.37" (1 m)	76003	356.25	135.0	9	76403	526.50	135.0
	K3-4 Sloped channel - 39.37" (1 m)	76004	356.25	136.2	9	76404	526.50	136.2
	K3-5 Sloped channel - 39.37" (1 m) ¹	76005	356.25	137.4	9	76405	526.50	137.4
	K3-6 Sloped channel - 39.37" (1 m)	76006	356.25	138.6	9	76406	526.50	138.6
	K3-7 Sloped channel - 39.37" (1 m)	76007	356.25	139.8	9	76407	526.50	139.8
	K3-8 Sloped channel - 39.37" (1 m)	76008	356.25	141.0	9	76408	526.50	141.0
	K3-9 Sloped channel - 39.37" (1 m)	76009	356.25	142.2	9	76409	526.50	142.2
	K3-10 Sloped channel - 39.37" (1 m) ¹	76010	356.25	143.4	9	76410	526.50	143.4
K3-010 Constant depth channel - 39.37" (1 m) ¹	76043	356.25	143.4	9	76443	526.50	143.4	
K3-0103 Constant depth channel - 19.69" (0.5 m) ¹	76044	237.50	75.3	18	76444	352.75	75.3	
K3-11 Sloped channel - 39.37" (1 m)	76011	356.25	144.6	9	76411	526.50	144.6	
K3-12 Sloped channel - 39.37" (1 m)	76012	356.25	145.8	9	76412	526.50	145.8	
K3-13 Sloped channel - 39.37" (1 m)	76013	356.25	147.0	9	76413	526.50	147.0	
K3-14 Sloped channel - 39.37" (1 m)	76014	356.25	148.2	9	76414	526.50	148.2	
K3-15 Sloped channel - 39.37" (1 m) ¹	76015	356.25	149.4	9	76415	526.50	149.4	
K3-16 Sloped channel - 39.37" (1 m)	76016	356.25	150.6	9	76416	526.50	150.6	
K3-17 Sloped channel - 39.37" (1 m)	76017	356.25	151.8	9	76417	526.50	151.8	
K3-18 Sloped channel - 39.37" (1 m)	76018	356.25	153.0	9	76418	526.50	153.0	
K3-19 Sloped channel - 39.37" (1 m)	76019	356.25	154.2	9	76419	526.50	154.2	
K3-20 Sloped channel - 39.37" (1 m) ¹	76020	356.25	155.4	9	76420	526.50	155.4	
K3-020 Constant depth channel - 39.37" (1 m) ¹	76045	356.25	155.4	9	76445	526.50	155.4	
K3-0203 Constant depth channel - 19.69" (0.5 m) ¹	76046	237.50	82.3	18	76446	352.75	82.3	
K3-21 Sloped channel - 39.37" (1 m)	76021	356.25	156.7	9	76421	526.50	156.7	
K3-22 Sloped channel - 39.37" (1 m)	76022	356.25	157.9	9	76422	526.50	157.9	
K3-23 Sloped channel - 39.37" (1 m)	76023	356.25	159.1	9	76423	526.50	159.1	
K3-24 Sloped channel - 39.37" (1 m)	76024	356.25	160.3	9	76424	526.50	160.3	
K3-25 Sloped channel - 39.37" (1 m) ¹	76025	356.25	161.5	9	76425	526.50	161.5	
K3-26 Sloped channel - 39.37" (1 m)	76026	356.25	162.7	9	76426	526.50	162.7	
K3-27 Sloped channel - 39.37" (1 m)	76027	356.25	163.9	9	76427	526.50	163.9	
K3-28 Sloped channel - 39.37" (1 m)	76028	356.25	165.1	9	76428	526.50	165.1	
K3-29 Sloped channel - 39.37" (1 m)	76029	356.25	166.3	9	76429	526.50	166.3	
K3-30 Sloped channel - 39.37" (1 m) ¹	76030	356.25	167.5	9	76430	526.50	167.5	
K3-030 Constant depth channel - 39.37" (1 m) ¹	76047	356.25	167.5	9	76447	526.50	167.5	
K3-0303 Constant depth channel - 19.69" (0.5 m) ¹	76048	237.50	89.5	18	76448	352.75	89.5	
K3-31 Sloped channel - 39.37" (1 m)	76031	356.25	168.7	9	76431	526.50	168.7	
K3-32 Sloped channel - 39.37" (1 m)	76032	356.25	169.9	9	76432	526.50	169.9	
K3-33 Sloped channel - 39.37" (1 m)	76033	356.25	171.1	9	76433	526.50	171.1	
K3-34 Sloped channel - 39.37" (1 m)	76034	356.25	172.3	9	76434	526.50	172.3	
K3-35 Sloped channel - 39.37" (1 m) ¹	76035	356.25	173.5	9	76435	526.50	173.5	
K3-36 Sloped channel - 39.37" (1 m)	76036	356.25	174.7	9	76436	526.50	174.7	
K3-37 Sloped channel - 39.37" (1 m)	76037	356.25	175.9	9	76437	526.50	175.9	
K3-38 Sloped channel - 39.37" (1 m)	76038	356.25	177.1	9	76438	526.50	177.1	
K3-39 Sloped channel - 39.37" (1 m)	76039	356.25	178.3	9	76439	526.50	178.3	
K3-40 Sloped channel - 39.37" (1 m) ¹	76040	356.25	179.5	9	76440	526.50	179.5	
K3-040 Constant depth channel - 39.37" (1 m) ¹	76049	356.25	179.5	9	76449	526.50	179.5	
K3-0403 Constant depth channel - 19.69" (0.5 m) ¹	76050	237.50	97.7	18	76450	352.75	97.7	
K3-903G/903S In-line catch basin - 19.69" (0.5 m) ^{2,4}	94614	720.00	88.0	6	94615	754.75	88.0	
K3-904G/904S In-line catch basin - 19.69" (0.5 m) ^{2,4}	94635	835.50	98.0	6	94636	869.75	98.0	
Series 600 catch basin riser (optional)	99902	173.00	10.0	24	99902	173.00	10.0	
Foul air trap - fits type 900 & 600 catch basins	90854	72.75	1.2	-	90854	72.75	1.2	
K3 Universal inlet/outlet/end cap	96826	85.50	2.5	-	96826	85.50	2.5	
Installation device - 12" system	97479	32.25	4.9	-	97479	32.25	4.9	
Grate removal tool	01318	29.19	0.3	-	01318	29.19	0.3	
QuickLok® locking bar - 12" system	10458	30.25	0.7	-	10458	30.25	0.7	

K300 Channel - 39.37" (1 m)



K300 Channel - 19.69" (0.5 m)



K3-903 In-line Catch Basin








K3 Universal Inlet/Outlet/End Cap (6"-8"-10" Sch. 40 connections)




Notes

1. This channel features 4" & 6" bottom knockouts.
2. Catch basin assembly: Polymer concrete top, blanking end kit, trash bucket and plastic base. Select grate (and locking bar unit) to suit.
3. Catch basin assembly: Polymer concrete top, blanking end kit, deep trash bucket, riser and plastic base. Select grate (and locking bar) to suit.
4. For channels and 903/904 catch basin - see K300 grates on pages 6 and 7.



DrainLok K300/KS300 Grates

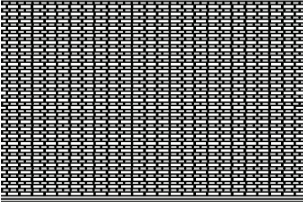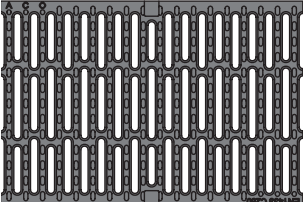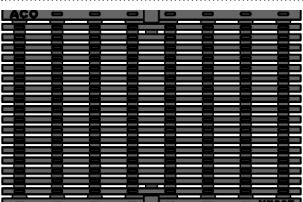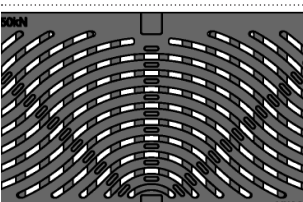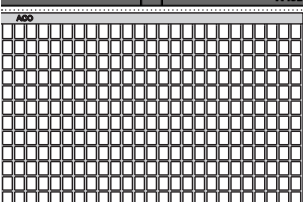		Length in (mm)	Part No.	Price \$	Weight lbs	Pallet Qty
LOAD CLASS A - EN 1433 - 3,372 LBS - 58 PSI						
	Type 847D Stainless longitudinal	39.37 (1000)	142223	2,257.50	29.0	100
	Type 848D Stainless longitudinal	19.69 (500)	142224	1,503.25	14.0	100
LOAD CLASS C - EN 1433 - 56,202 LBS - 967 PSI						
	Type 860D Ductile iron slotted	19.69 (500)	13870	206.50	38.0	50
	Type 876D Ductile iron longitudinal	19.69 (500)	99588	229.25	35.0	48
	Type 880D Ductile iron wave	19.69 (500)	99581	259.50	37.0	36
	Type 805D Galvanized mesh Type 830D Stainless mesh	19.69 (500) 19.69 (500)	133675 133678	420.75 1,461.75	26.2 29.5	50 50

QuickLok® K300/KS300 grates

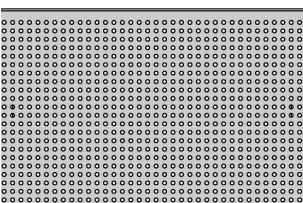LOAD CLASS C - EN 1433 - 56,202 LBS - 967 PSI						
	Type 811Q Galvanized perforated	39.37 (1000)	98967	759.25	68.0	80
	Type 813Q Galvanized perforated	19.69 (500)	98966	506.00	34.0	80
	Type 865Q Stainless perforated	39.37 (1000)	98968	1,787.75	68.0	80
	Type 866Q Stainless perforated	19.69 (500)	98969	1,261.25	35.0	80

QuickLok® K300/KS300 Grates (cont.)

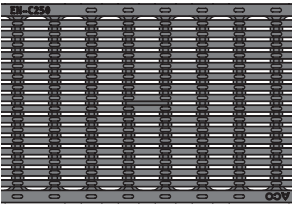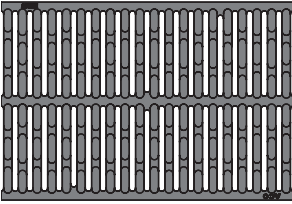		Length in (mm)	Part No.	Price \$	Weight lbs	Pallet Qty
LOAD CLASS E - EN 1433 - 134,885 LBS - 2,321 PSI						
	Type 878Q Ductile iron longitudinal	19.69 (500)	138130	310.00	52.0	36
	Type 861Q Ductile iron slotted	19.69 (500)	10431	310.00	58.0	36



K50 Channel -
39.37" (1 m)






**MiniKlassik K50/KS50
Parts Table**

	K50 Galvanized Edge				KS50 Stainless Edge		
	Part No.	Price \$	Weight lbs	Pallet Qty	Part No.	Price \$	Weight lbs
Constant depth channel - 39.37" (1 m)	04071	85.50	18.0	60	06750	135.00	18.0
Closing end cap	95395	16.21	0.3	-	95403	23.24	0.3

Non-locking K50/KS50 Grates

		Length in (mm)	Part No.	Price \$	Weight lbs	Pallet Qty
LOAD CLASS A - EN 1433 - 3,372 LBS - 116 PSI						
	Type 210 Galvanized perforated	39.37 (1000)	94699	88.75	4.0	200
	Type 251 Stainless perforated	39.37 (1000)	95165	183.50	4.0	200
	Type 220 Galvanized slotted	39.37 (1000)	95537	67.00	4.0	200
	Type 250 Stainless slotted	39.37 (1000)	95545	151.25	4.0	200

DrainLok K50/KS50 grates

LOAD CLASS A - EN 1433 - 3,372 LBS - 116 PSI						
	Type 200D Plastic mosaic black	19.69 (500)	138104	22.16	0.7	900
	Type 201D Plastic mosaic gray	19.69 (500)	138105	25.67	0.7	900
	Type 202D Plastic mosaic tan	19.69 (500)	138106	25.67	0.7	900
LOAD CLASS B - EN 1433 - 28,101 LBS - 967 PSI						
	Type 247D Stainless longitudinal	39.37 (1000)	142436	524.25	5.9	200
LOAD CLASS C - EN 1433 - 56,202 LBS - 1,934 PSI						
	Type 276D Ductile iron longitudinal	19.69 (500)	138107	58.00	7.3	260


LOAD CLASS C - EN 1433 - 56,202 LBS - 1,934 PSI



Brickslot 100 - for K100/KS100

	Part No.	Price \$	Weight lbs	Pallet Qty
Type 441 Galvanized steel Brickslot - 39.37" (1 m)	138040	182.25	17.6	84
Type 442 Galvanized steel Brickslot - 19.69" (0.5 m)	138041	134.00	9.0	128
Type 482 Galvanized steel Brickslot access unit - 19.69" (0.5 m)	138042	272.00	16.4	50
Type 443 Stainless steel Brickslot - 39.37" (1 m)	138045	363.00	17.6	150
Type 444 Stainless steel Brickslot - 19.69" (0.5 m)	138046	219.25	9.0	200
Type 484 Stainless steel Brickslot access unit - 19.69" (0.5 m)	138047	513.00	16.4	50


- K100/KS100 channels apply (page 1).
- H100-8, H100-10, H100K-8, and H100KS-8 channels apply (page 14).



Heel-resistant Brickslot 100 - for K100/KS100

Type 470 Galvanized steel Brickslot - 39.37" (1 m)	138050	206.50	18.0	84
Type 471 Galvanized steel Brickslot - 19.69" (0.5 m)	138051	139.50	9.2	128
Type 483 Galvanized steel Brickslot access unit - 19.69" (0.5 m)	138052	284.75	11.0	50
Type 472 Stainless steel Brickslot - 39.37" (1 m)	138055	374.50	18.0	150
Type 473 Stainless steel Brickslot - 19.69" (0.5 m)	138056	219.25	9.2	200
Type 485 Stainless steel Brickslot access unit - 19.69" (0.5 m)	138057	513.00	11.0	50

- K100/KS100 channels apply (page 1).
- H100-8, H100-10, H100K-8, and H100KS-8 channels apply (page 14).



Twinslot 200 - for K200/KS200

Type 641 Galvanized steel Brickslot - 39.37" (1 m)	138060	305.50	36.3	36
Type 642 Galvanized steel Brickslot - 19.69" (0.5 m)	138061	248.00	18.7	72
Type 682 Galvanized steel Brickslot access unit - 19.69" (0.5 m)	138062	501.25	32.4	25
Type 643 Stainless steel Brickslot - 39.37" (1 m)	138065	651.00	36.3	75
Type 644 Stainless steel Brickslot - 19.69" (0.5 m)	138066	489.75	18.7	100
Type 684 Stainless steel Brickslot access unit - 19.69" (0.5 m)	138067	792.75	32.4	25

- K200/KS200 channels apply (page 3).
- H200K-13 and H200KS-13 channels apply (page 14).



Heel Resistant Brickslot 200 - for K200/KS200

Type 670 Galvanized steel Brickslot - 39.37" (1 m)	138070	317.00	28.2	24
Type 672 Galvanized steel Brickslot - 19.69" (0.5 m)	138071	248.00	14.5	56
Type 683 Galvanized steel Brickslot access unit - 19.69" (0.5 m)	138072	501.25	29.0	25
Type 673 Stainless steel Brickslot - 39.37" (1 m)	138075	651.00	28.2	75
Type 674 Stainless steel Brickslot - 19.69" (0.5 m)	138076	466.75	14.5	100
Type 685 Stainless steel Brickslot access unit - 19.69" (0.5 m)	138077	787.00	29.0	25


- K200/KS200 channels apply (page 3).
- H200K-13 and H200KS-13 channels apply (page 14).

Brickslot Accessories


Grate removal tool for access unit	01318	29.19	0.3	-
------------------------------------	-------	--------------	-----	---

PowerDrain® S100K Parts Table


S100K Channel -
39.37" (1 m)




S100K Channel -
19.69" (0.5 m)




SK1-901D In-line Catch Basin



SK1-621D Style Catch Basin




SK1 Ductile Iron
Longitudinal Grate



SK1 Ductile Iron Slotted Grate



SK1 Ductile Iron 4-bolt Grate*



*includes 4 qty M10 bolts


	Part No.	Price \$	Weight lbs	Pallet Qty
SK1-00 Constant depth channel - 39.37" (1 m) ¹	67041	236.25	48.1	28
SK1-1 Sloped channel - 39.37" (1 m)	67001	236.25	48.1	28
SK1-2 Sloped channel - 39.37" (1 m)	67002	236.25	49.1	28
SK1-3 Sloped channel - 39.37" (1 m)	67003	236.25	50.1	28
SK1-4 Sloped channel - 39.37" (1 m)	67004	236.25	51.1	28
SK1-5 Sloped channel - 39.37" (1 m) ¹	67005	236.25	52.1	28
SK1-6 Sloped channel - 39.37" (1 m)	67006	236.25	53.1	28
SK1-7 Sloped channel - 39.37" (1 m)	67007	236.25	54.1	28
SK1-8 Sloped channel - 39.37" (1 m)	67008	236.25	55.1	28
SK1-9 Sloped channel - 39.37" (1 m)	67009	236.25	56.1	28
SK1-10 Sloped channel - 39.37" (1 m) ¹	67010	236.25	57.1	28
SK1-010 Constant depth channel - 39.37" (1 m) ¹	67043	236.25	57.1	28
SK1-0103 Constant depth channel - 19.69" (0.5 m) ¹	67044	162.75	29.4	56
SK1-11 Sloped channel - 39.37" (1 m)	67011	236.25	58.1	28
SK1-12 Sloped channel - 39.37" (1 m)	67012	236.25	59.1	28
SK1-13 Sloped channel - 39.37" (1 m)	67013	236.25	60.1	28
SK1-14 Sloped channel - 39.37" (1 m)	67014	236.25	61.1	28
SK1-15 Sloped channel - 39.37" (1 m) ¹	67015	236.25	62.1	28
SK1-16 Sloped channel - 39.37" (1 m)	67016	236.25	63.1	28
SK1-17 Sloped channel - 39.37" (1 m)	67017	236.25	64.1	28
SK1-18 Sloped channel - 39.37" (1 m)	67018	236.25	65.1	28
SK1-19 Sloped channel - 39.37" (1 m)	67019	236.25	66.1	28
SK1-20 Sloped channel - 39.37" (1 m) ¹	67020	236.25	67.1	28
SK1-020 Constant depth channel - 39.37" (1 m) ¹	67045	236.25	67.1	28
SK1-0203 Constant depth channel - 19.69" (0.5 m) ¹	67046	162.75	33.9	56
SK1-21 Sloped channel - 39.37" (1 m)	67021	236.25	68.1	21
SK1-22 Sloped channel - 39.37" (1 m)	67022	236.25	69.1	21
SK1-23 Sloped channel - 39.37" (1 m)	67023	236.25	70.0	21
SK1-24 Sloped channel - 39.37" (1 m)	67024	236.25	71.0	21
SK1-25 Sloped channel - 39.37" (1 m) ¹	67025	236.25	72.0	21
SK1-26 Sloped channel - 39.37" (1 m)	67026	236.25	73.0	21
SK1-27 Sloped channel - 39.37" (1 m)	67027	236.25	74.0	21
SK1-28 Sloped channel - 39.37" (1 m)	67028	236.25	75.0	21
SK1-29 Sloped channel - 39.37" (1 m)	67029	236.25	76.0	21
SK1-30 Sloped channel - 39.37" (1 m) ¹	67030	236.25	77.0	21
SK1-030 Constant depth channel - 39.37" (1 m) ¹	67047	236.25	77.0	21
SK1-0303 Constant depth channel - 19.69" (0.5 m) ¹	67048	162.75	38.4	42
SK1-31 Sloped channel - 39.37" (1 m)	67031	236.25	78.0	21
SK1-32 Sloped channel - 39.37" (1 m)	67032	236.25	79.0	21
SK1-33 Sloped channel - 39.37" (1 m)	67033	236.25	80.0	21
SK1-34 Sloped channel - 39.37" (1 m)	67034	236.25	81.0	21
SK1-35 Sloped channel - 39.37" (1 m) ¹	67035	236.25	82.0	21
SK1-36 Sloped channel - 39.37" (1 m)	67036	236.25	83.0	21
SK1-37 Sloped channel - 39.37" (1 m)	67037	236.25	84.0	21
SK1-38 Sloped channel - 39.37" (1 m)	67038	236.25	85.0	21
SK1-39 Sloped channel - 39.37" (1 m)	67039	236.25	86.0	21
SK1-40 Sloped channel - 39.37" (1 m) ¹	67040	236.25	87.0	21
SK1-040 Constant depth channel - 39.37" (1 m) ¹	67049	236.25	87.0	21
SK1-0403 Constant depth channel - 19.69" (0.5 m) ¹	67050	162.75	43.0	42
SK1-901D In-line catch basin - 19.69" (0.5 m) ^{2,4}	67051	482.75	86.0	6
SK1-621D catch basin - 19.69" (0.5 m) ^{2,4}	67053	660.25	75.7	6
SK1-631D catch basin - 19.69" (0.5 m) ^{3,4}	67054	759.25	85.7	6
Series 600 catch basin riser (optional)	99902	173.00	10.0	24
Foul air trap - fits Type 900 & 600 basins	90854	72.75	1.2	-
SK1-304-6 6" Inlet cap	96861	71.50	6.2	-
SK1-308-6 6" Outlet end cap	96862	71.50	6.0	-
SK1-404-6 6" Inlet end cap	96863	71.50	7.2	-
SK1-408-6 6" Outlet end cap	96864	71.50	7.0	-
SK1 Universal inlet/outlet/end cap	96824	17.50	0.4	-
Debris strainer for 4" bottom knockout	93488	52.00	0.2	-
Outlet adapter - 4" oval to 6" round	95140	21.00	1.1	-
Installation device - 4" system	97477	29.19	2.8	-
Grate removal tool	01318	29.19	0.3	-
SK1 Ductile iron longitudinal grate - 19.69" (0.5 m) (Load Class F)	96096	87.75	13.9	200
SK1 Ductile iron slotted grate - 19.69" (0.5 m) (Load Class F)	96082	64.50	12.9	200
SK1 Ductile iron 4-bolt iron grate - 19.69" (0.5 m) (Load Class F)	99590	87.75	10.8	140
Replacement bolt for 4-bolt grate	95526	3.50	0.1	-
Tamper-resistant bolt for 4-bolt grate	138127	12.95	0.1	-
Tamper-resistant bolt driver	138128	124.50	0.1	-
PowerLok® safety clip	10443	3.50	0.1	-
PowerDrain® concrete anchors (2 per bag)	97496	27.00	0.3	-

Notes


1. This channel features 4" & 6" bottom knockouts.
2. Catch basin assembly: Polymer concrete top, blanking end kit, trash bucket and plastic base. Select grate to suit.
3. Catch basin assembly: Polymer concrete top, blanking end kit, deep trash bucket, riser and plastic base. Select grate to suit.
4. For SK1-901D select grate from above options. For SK1-621D & SK1-631D see page 11.

PowerDrain® S200K Parts Table


S200K Channel -
39.37" (1 m)




S200K Channel -
19.69" (0.5 m)



SK2-902D In-line Catch Basin



SK2-631D Style Catch Basin

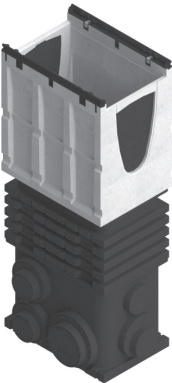


SK2 Ductile Iron
Longitudinal Grate



SK2 Ductile Iron Slotted Grate



SK2 Ductile Iron 4-bolt Grate*




*includes 4 qty M10 bolts

Part No.	Price \$	Weight lbs	Pallet Qty
SK2-00 Constant depth channel - 39.37" (1 m) ¹	68041 364.25	85.2	16
SK2-1 Sloped channel - 39.37" (1 m)	68001 364.25	85.2	16
SK2-2 Sloped channel - 39.37" (1 m)	68002 364.25	86.3	16
SK2-3 Sloped channel - 39.37" (1 m)	68003 364.25	87.4	16
SK2-4 Sloped channel - 39.37" (1 m)	68004 364.25	88.5	16
SK2-5 Sloped channel - 39.37" (1 m) ¹	68005 364.25	89.6	16
SK2-6 Sloped channel - 39.37" (1 m)	68006 364.25	90.7	16
SK2-7 Sloped channel - 39.37" (1 m)	68007 364.25	91.8	16
SK2-8 Sloped channel - 39.37" (1 m)	68008 364.25	92.9	16
SK2-9 Sloped channel - 39.37" (1 m)	68009 364.25	94.0	16
SK2-10 Sloped channel - 39.37" (1 m) ¹	68010 364.25	95.1	16
SK2-010 Constant depth channel - 39.37" (1 m) ¹	68043 364.25	95.2	16
SK2-0103 Constant depth channel - 19.69" (0.5 m) ¹	68044 295.25	61.2	24
SK2-11 Sloped channel - 39.37" (1 m)	68011 364.25	96.2	12
SK2-12 Sloped channel - 39.37" (1 m)	68012 364.25	97.3	12
SK2-13 Sloped channel - 39.37" (1 m)	68013 364.25	98.4	12
SK2-14 Sloped channel - 39.37" (1 m)	68014 364.25	99.6	12
SK2-15 Sloped channel - 39.37" (1 m) ¹	68015 364.25	100.7	12
SK2-16 Sloped channel - 39.37" (1 m)	68016 364.25	101.8	12
SK2-17 Sloped channel - 39.37" (1 m)	68017 364.25	102.9	12
SK2-18 Sloped channel - 39.37" (1 m)	68018 364.25	104.0	12
SK2-19 Sloped channel - 39.37" (1 m)	68019 364.25	105.1	12
SK2-20 Sloped channel - 39.37" (1 m) ¹	68020 364.25	106.2	12
SK2-020 Constant depth channel - 39.37" (1 m) ¹	68045 364.25	106.2	12
SK2-0203 Constant depth channel - 19.69" (0.5 m) ¹	68046 295.25	68.8	24
SK2-21 Sloped channel - 39.37" (1 m)	68021 364.25	107.3	12
SK2-22 Sloped channel - 39.37" (1 m)	68022 364.25	108.4	12
SK2-23 Sloped channel - 39.37" (1 m)	68023 364.25	109.5	12
SK2-24 Sloped channel - 39.37" (1 m)	68024 364.25	110.6	12
SK2-25 Sloped channel - 39.37" (1 m) ¹	68025 364.25	111.7	12
SK2-26 Sloped channel - 39.37" (1 m)	68026 364.25	112.3	12
SK2-27 Sloped channel - 39.37" (1 m)	68027 364.25	113.9	12
SK2-28 Sloped channel - 39.37" (1 m)	68028 364.25	115.8	12
SK2-29 Sloped channel - 39.37" (1 m)	68029 364.25	116.1	12
SK2-30 Sloped channel - 39.37" (1 m) ¹	68030 364.25	117.2	12
SK2-030 Constant depth channel - 39.37" (1 m) ¹	68047 364.25	117.2	12
SK2-0303 Constant depth channel - 19.69" (0.5 m) ¹	68048 295.25	73.3	24
SK2-31 Sloped channel - 39.37" (1 m)	68031 364.25	118.4	12
SK2-32 Sloped channel - 39.37" (1 m)	68032 364.25	119.5	12
SK2-33 Sloped channel - 39.37" (1 m)	68033 364.25	120.6	12
SK2-34 Sloped channel - 39.37" (1 m)	68034 364.25	121.7	12
SK2-35 Sloped channel - 39.37" (1 m) ¹	68035 364.25	122.8	12
SK2-36 Sloped channel - 39.37" (1 m)	68036 364.25	123.9	12
SK2-37 Sloped channel - 39.37" (1 m)	68037 364.25	125.0	12
SK2-38 Sloped channel - 39.37" (1 m)	68038 364.25	126.1	12
SK2-39 Sloped channel - 39.37" (1 m)	68039 364.25	127.2	12
SK2-40 Sloped channel - 39.37" (1 m) ¹	68040 364.25	128.3	12
SK2-040 Constant depth channel - 39.37" (1 m) ¹	68049 364.25	128.3	12
SK2-0403 Constant depth channel - 19.69" (0.5 m) ¹	68050 295.25	82.1	24
SK2-902D In-line catch basin - 19.69" (0.5 m) ^{2,4}	68053 501.25	81.8	6
SK2-621D catch basin - 19.69" (0.5 m) ^{2,4}	68055 662.50	116.0	6
SK2-631D catch basin - 19.69" (0.5 m) ^{3,4}	68056 777.50	126.0	6
Series 600 catch basin riser (optional)	99902 173.00	10.0	24
Foul air trap - fits Type 900 & 600 basins	90854 72.75	1.2	-
SK2 Universal inlet/outlet/end cap	96823 56.50	1.4	-
Debris strainer for 4" bottom knockout	93488 52.00	0.2	-
Installation device - 8" system	97478 30.25	4.0	-
Grate removal tool	01318 29.19	0.3	-
SK2 Ductile iron longitudinal grate - 19.69" (0.5 m) (Load Class E)	72263 175.25	26.2	64
SK2 Ductile iron slotted grate - 19.69" (0.5 m) (Load Class F)	02449 152.25	32.0	80
SK2 Ductile iron 4-bolt grate - 19.69" (0.5 m) (Load Class F)	99591 183.50	26.5	80
Replacement bolt for 4-bolt grate	95526 3.50	0.1	-
Tamper-resistant bolt for 4-bolt grate	138127 12.95	0.1	-
Tamper-resistant bolt driver	138128 124.50	0.1	-
PowerLok® safety clip	10443 3.50	0.1	-
PowerDrain® concrete anchors (2 per bag)	97496 27.00	0.3	-

Notes

1. This channel features bottom knockouts; 4" & 6" for 200mm wide channels.
2. Catch basin assembly: Polymer concrete top, blanking end kit, trash bucket and plastic grate. Select grate to suit.
3. Catch basin assembly: Polymer concrete top, blanking end kit, deep trash bucket, riser and plastic base. Select grate to suit.
4. For SK2-902D select grate from above options. For SK2-621D & SK2-631D see page 11.


S300K Channel -
39.37" (1 m)




S300K Channel -
19.69" (0.5 m)




SK3-903D In-line Catch Basin




SK3 Ductile Iron
Longitudinal Grate



SK3 Ductile Iron
Slotted Grate



SK3 Ductile Iron
4-bolt Grate*



*includes 4 qty M10 bolts

PowerDrain® S300K Parts Table


	Part No.	Price \$	Weight lbs	Pallet Qty
SK3-00 Constant depth channel - 39.37" (1 m) ¹	69041	542.75	140.0	9
SK3-1 Sloped channel - 39.37" (1 m)	69001	542.75	140.0	9
SK3-2 Sloped channel - 39.37" (1 m)	69002	542.75	141.3	9
SK3-3 Sloped channel - 39.37" (1 m)	69003	542.75	142.8	9
SK3-4 Sloped channel - 39.37" (1 m)	69004	542.75	144.1	9
SK3-5 Sloped channel - 39.37" (1 m) ¹	69005	542.75	145.4	9
SK3-6 Sloped channel - 39.37" (1 m)	69006	542.75	146.9	9
SK3-7 Sloped channel - 39.37" (1 m)	69007	542.75	148.2	9
SK3-8 Sloped channel - 39.37" (1 m)	69008	542.75	149.5	9
SK3-9 Sloped channel - 39.37" (1 m)	69009	542.75	150.9	9
SK3-10 Sloped channel - 39.37" (1 m) ¹	69010	542.75	152.3	9
SK3-010 Constant depth channel - 39.37" (1 m) ¹	69042	542.75	152.3	9
SK3-0103 Constant depth channel - 19.69" (0.5 m) ¹	69045	338.75	84.2	18
SK3-11 Sloped channel - 39.37" (1 m)	69011	542.75	153.6	9
SK3-12 Sloped channel - 39.37" (1 m)	69012	542.75	155.0	9
SK3-13 Sloped channel - 39.37" (1 m)	69013	542.75	156.4	9
SK3-14 Sloped channel - 39.37" (1 m)	69014	542.75	157.7	9
SK3-15 Sloped channel - 39.37" (1 m) ¹	69015	542.75	149.1	9
SK3-16 Sloped channel - 39.37" (1 m)	69016	542.75	160.5	9
SK3-17 Sloped channel - 39.37" (1 m)	69017	542.75	161.9	9
SK3-18 Sloped channel - 39.37" (1 m)	69018	542.75	163.2	9
SK3-19 Sloped channel - 39.37" (1 m)	69019	542.75	164.6	9
SK3-20 Sloped channel - 39.37" (1 m) ¹	69020	542.75	166.0	9
SK3-020 Constant depth channel - 39.37" (1 m) ¹	69044	542.75	166.0	9
SK3-0203 Constant depth channel - 19.69" (0.5 m) ¹	69047	338.75	92.0	18
SK3-21 Sloped channel - 39.37" (1 m)	69021	542.75	167.3	9
SK3-22 Sloped channel - 39.37" (1 m)	69022	542.75	168.7	9
SK3-23 Sloped channel - 39.37" (1 m)	69023	542.75	170.1	9
SK3-24 Sloped channel - 39.37" (1 m)	69024	542.75	171.4	9
SK3-25 Sloped channel - 39.37" (1 m) ¹	69025	542.75	172.7	9
SK3-26 Sloped channel - 39.37" (1 m)	69026	542.75	174.2	9
SK3-27 Sloped channel - 39.37" (1 m)	69027	542.75	175.5	9
SK3-28 Sloped channel - 39.37" (1 m)	69028	542.75	176.8	9
SK3-29 Sloped channel - 39.37" (1 m)	69029	542.75	178.3	9
SK3-30 Sloped channel - 39.37" (1 m) ¹	69030	542.75	179.6	9
SK3-030 Constant depth channel - 39.37" (1 m) ¹	69046	542.75	179.6	9
SK3-0303 Constant depth channel - 19.69" (0.5 m) ¹	69049	338.75	100.0	18
SK3-31 Sloped channel - 39.37" (1 m)	69031	542.75	180.9	9
SK3-32 Sloped channel - 39.37" (1 m)	69032	542.75	182.4	9
SK3-33 Sloped channel - 39.37" (1 m)	69033	542.75	183.7	9
SK3-34 Sloped channel - 39.37" (1 m)	69034	542.75	185.0	9
SK3-35 Sloped channel - 39.37" (1 m) ¹	69035	542.75	186.5	9
SK3-36 Sloped channel - 39.37" (1 m)	69036	542.75	187.7	9
SK3-37 Sloped channel - 39.37" (1 m)	69037	542.75	189.1	9
SK3-38 Sloped channel - 39.37" (1 m)	69038	542.75	190.5	9
SK3-39 Sloped channel - 39.37" (1 m)	69039	542.75	191.9	9
SK3-40 Sloped channel - 39.37" (1 m) ¹	69040	542.75	193.2	9
SK3-040 Constant depth channel - 39.37" (1 m) ¹	69048	542.75	193.2	9
SK3-0403 Constant depth channel - 19.69" (0.5 m) ¹	69050	338.75	109.0	18
SK3-903D In-line catch basin - 19.69" (0.5 m) ^{2,4}	69053	685.50	99.4	6
SK3-904D In-line catch basin - 19.69" (0.5 m) ^{3,4}	69054	777.50	104.4	6
Series 600 catch basin riser (optional)	99902	173.00	10.0	24
Foul air trap - fits Type 900 & 600 basins	90854	72.75	1.2	-
SK3 Universal inlet/outlet/end cap	96827	93.75	2.5	-
Installation device - 12" system	97479	32.25	4.9	-
Grate removal tool	01318	29.19	0.3	-
SK3 Ductile iron longitudinal grate - 19.69" (0.5 m) (Load Class E)	96833	321.50	62.5	36
SK3 Ductile iron slotted grate - 19.69" (0.5 m) (Load Class F)	02445	229.25	55.0	48
SK3 Ductile iron 4-bolt grate - 19.69" (0.5 m) (Load Class F)	99592	333.00	55.3	36
Replacement bolt for 4-bolt grate	95526	3.50	0.1	-
Tamper-resistant bolt for 4-bolt grate	138127	12.95	0.1	-
Tamper-resistant bolt driver	138128	124.50	0.1	-
PowerLok® safety clip	10443	3.50	0.1	-
PowerDrain® concrete anchors (2 per bag)	97496	27.00	0.3	-

Notes

1. This channel features 4" & 6" bottom knockouts.
2. Catch basin assembly: Polymer concrete top, blanking end kit, trash bucket and plastic base. Select grate to suit.
3. Catch basin assembly: Polymer concrete top, blanking end kit, deep trash bucket, riser and plastic base. Select grate to suit.
4. For SK3-903D and SK3-904D select grate from above options.

FlowDrain FG200 Parts Table


FG200 Channel -
108" (2.75 m)

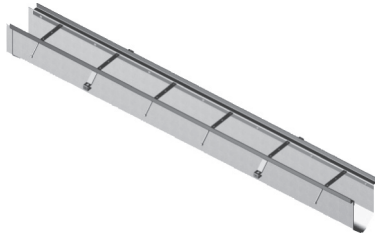


FG200 Channel -
36" (0.915 m)



Outlet Cap




F660 Catch Basin and
Accessories



Pipe adapter

Channel adapter

F880 Catch Basin and
Accessories

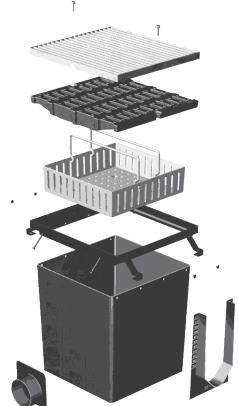







Pipe adapter

Channel adapter

	Part No.	Price \$	Weight lbs
F801 Sloped channel - 108" (2.75 m)	99006	607.25	11.0
F802 Sloped channel - 108" (2.75 m)	99013	607.25	12.0
F803 Sloped channel - 108" (2.75 m)	99021	607.25	13.0
F803N Constant depth channel - 108" (2.75 m)	99048	607.25	15.5
F803N3 Constant depth channel - 36" (0.915 m)	99034	275.50	5.2
F804 Sloped channel - 108" (2.75 m)	99055	607.25	14.1
F805 Sloped channel - 108" (2.75 m)	99062	607.25	15.2
F806 Sloped channel - 108" (2.75 m)	99071	607.25	16.3
F806N Constant depth channel - 108" (2.75 m)	99095	607.25	16.3
F806N3 Constant depth channel - 36" (0.915 m)	99084	275.50	5.5
F807 Sloped channel - 108" (2.75 m)	99109	607.25	17.4
F808 Sloped channel - 108" (2.75 m)	99116	607.25	18.5
F809 Sloped channel - 108" (2.75 m)	99123	607.25	19.6
F809N Constant depth channel - 108" (2.75 m)	99145	607.25	19.6
F809N3 Constant depth channel - 36" (0.915 m)	99132	275.50	6.5
F810 Sloped channel - 108" (2.75 m)	99156	607.25	20.7
F811 Sloped channel - 108" (2.75 m)	99162	607.25	21.8
F812 Sloped channel - 108" (2.75 m)	99175	607.25	23.0
F812N Constant depth channel - 108" (2.75 m)	99192	607.25	23.0
F812N3 Constant depth channel - 36" (0.915 m)	99186	275.50	7.7
Black coated steel frame - 108" (2.75 m)	97066	374.50	57.9
Black coated steel frame - 36" (0.915 m)	35916	146.50	19.3
Galvanized steel frame - 108" (2.75 m)	97079	443.50	57.9
Galvanized steel frame - 36" (0.915 m)	98538	169.50	19.3
Stainless steel frame - 108" (2.75 m)	97087	1,162.50	57.9
Stainless steel frame - 36" (0.915 m)	98545	425.25	19.3
Closing cap (Female) with black end frame	98365	93.75	1.1
Closing cap (Female) with galvanized steel end frame	98386	93.75	1.1
Closing cap (Female) with stainless steel end frame	98375	101.75	1.1
Closing cap (Male) with black end frame	98363	93.75	1.3
Closing cap (Male) with galvanized steel end frame	98382	93.75	1.3
Closing cap (Male) with stainless steel end frame	98372	101.75	1.3
Outlet cap (Male) with black end frame	98361	93.75	1.8
Outlet cap (Male) with galvanized steel end frame	98381	93.75	1.8
Outlet cap (Male) with stainless steel end frame	98373	101.75	1.8
Vertical outlet adapter - 4", 6" or 8" outlet	98103	87.75	1.6
FG200 channel/catch basin adapter	98171	87.75	1.1
F660 Catch basin - 24" x 12"	98069	458.50	22.0
F660 Black coated steel frame	97995	178.75	13.8
F660 Galvanized steel frame	98008	190.50	14.4
F660 Stainless steel frame	98013	386.00	14.4
F660 Plastic trash bucket	98067	282.25	5.0
F880 Catch basin - 24" x 24"	98075	678.75	22.0
F880 Black coated steel frame	98021	224.75	23.2
F880 Galvanized steel frame	98034	271.00	24.2
F880 Stainless steel frame*	98048	578.50	24.2
F880 Plastic trash bucket	98059	363.00	8.4
4" Pipe plain end adapter	97425	52.00	0.4
6" Pipe plain end adapter	97438	52.00	0.6
8" pipe plain end adapter	97444	52.00	0.9
Replacement galvanized steel socket head bolts (Qty 4) - for bar grate	93895	9.45	0.4
Replacement stainless steel socket head bolts (Qty 4) - for bar grate	93897	11.62	0.4
Replacement stainless steel hex head bolts (Qty 2) - for iron grates	93892	7.00	0.2

Notes

1. Channel weights are for fiberglass body only - add frame weight for total unit weight.
2. Closing/Outlet caps can be cut down to suit all channels.
3. Frames supplied with plastic snap-fit studs for connecting to fiberglass body.
4. See page 13 for grate details.

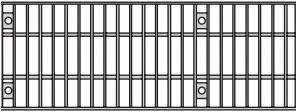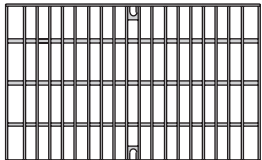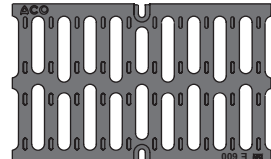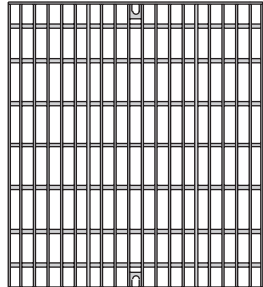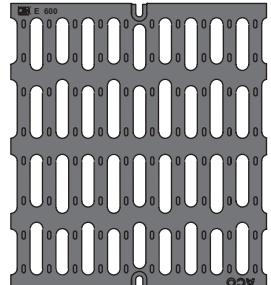		Length in	Part No.	Price \$	Weight lbs	Pallet Qty
FG200 Grates						
LOAD CLASS C - EN 1433 - 56,202 LBS - 967 PSI						
	Galvanized steel bar	36.0	93899	268.50	28.6	90
	Stainless steel bar	36.0	93891	1,013.75	28.6	
LOAD CLASS E - EN 1433 - 134,885 LBS - 2,321 PSI						
	Ductile iron slotted	18.0	93896	126.00	28.7	80
	Ductile iron longitudinal	18.0	93893	190.50	25.5	80
F660 Grates						
LOAD CLASS C - EN 1433 - 56,202 LBS - 967 PSI						
	Galvanized steel bar	24.0	97443	359.75	29.0	20
	Stainless steel bar	24.0	97442	1,405.50	28.0	
LOAD CLASS E - EN 1433 - 134,885 LBS - 2,321 PSI						
	Ductile iron slotted	24.0	97449	443.50	75.0	20
F880 Grates						
LOAD CLASS C - EN 1433 - 56,202 LBS - 967 PSI						
	Galvanized steel bar	24.0	97452	524.25	52.0	25
	Stainless steel bar	24.0	97455	2,044.75	48.0	
LOAD CLASS E - EN 1433 - 134,885 LBS - 2,321 PSI						
	Ductile iron slotted	24.0	97453	1,440.00	209.0	10

SlabDrain Parts Table

H100-8, H100-10



	Part No.	Price \$	Weight lbs	Pallet Qty	H100-8 - No Rail		H100-10 - No Rail	
					Part No.	Price \$	Weight lbs	Part No.
Constant depth channel - 39.37" (1 m)	00985	129.00	20.0	56	00549	129.00	25.0	
Closing end cap	05935	17.50	1.0	-	05939	17.50	1.0	
Debris strainer for 4" bottom knockout	93488	52.00	0.2	-	93488	52.00	0.2	
Grate removal tool	01318	29.19	0.3	-	01318	29.19	0.3	
QuickLok® Locking bar - 4" system	02899	9.45	0.1	-	02899	9.45	0.1	

Note: See K100 QuickLok® grate options - page 2.

H100K-6



	H100K-6 - Galvanized				H100KS-6 - Stainless		
Constant depth channel - 39.37" (1 m)	141803	121.00	7.6	56	141804	230.75	7.6
Closing end cap	141805	18.60	0.1	-	296097	22.16	0.1
Debris strainer for 4" bottom knockout	93488	52.00	0.1	-	93488	52.00	0.1
Grate removal tool	01318	29.19	0.1	-	01318	29.19	0.1

Note: See K100 DrainLok grate options - page 2.


H100K-8



	H100K-8 - Galvanized				H100KS-8 - Stainless		
Constant depth channel - 39.37" (1 m) ¹	95365	129.00	16.0	56	95373	248.00	16.0
Closing end cap	98462	19.72	1.0	-	98471	23.24	1.0
Debris strainer for 4" bottom knockout	93488	52.00	0.2	-	93488	52.00	0.2
Grate removal tool	01318	29.19	0.3	-	01318	29.19	0.3
QuickLok® Locking bar - 4" system	02899	9.45	0.1	-	02899	9.45	0.1

Note: See K100 grate options - page 2.


H200K-13



	H200K-13 - Galvanized				H200KS-13 - Stainless		
Constant depth channel - 39.37" (1 m) ¹	93454	178.75	57.4	20	93455	385.00	57.4
Closing end cap	93458	37.25	1.0	-	93459	49.75	1.0
Debris strainer for 4" bottom knockout	93488	52.00	0.2	-	93488	52.00	0.2
Grate removal tool	01318	29.19	0.3	-	01318	29.19	0.3
QuickLok® Locking bar - 8" system	10457	23.24	0.5	-	10457	23.24	0.5

Note: See K200 grate options - page 4.

H300K-13



	H300K-13 - Galvanized				H300KS-13 - Stainless		
Constant depth channel - 39.37" (1 m) ¹	93464	229.25	71.6	15	93465	459.75	71.6
Closing end cap	93468	48.50	1.4	-	93469	54.50	1.4
Grate removal tool	01318	29.19	0.3	-	01318	29.19	0.3
QuickLok® locking bar - 12" system	10458	30.25	0.7	-	10458	30.25	0.7


Note: See K300 grate options - pages 6-7.

Membrane No-Hub Drain



Membrane No-Hub Drain - Stainless Steel	01043	386.00	8.9	40
---	-------	---------------	-----	----

Cross Sidewalk Drain (CSD)



	Part No.	Price \$	Weight lbs	Pallet Qty
Down spout pipe inlet	96932	54.50	6.0	-
Curb outlet Type 6	96924	61.50	12.7	-

Note: CSD for use with H100K-8 channel - see above.

H100SK-10**SlabDrain H100SK-10 Ductile Iron Edge**


	Part No.	Price \$	Weight lbs	Pallet Qty
Constant depth channel - 39.37" (1 m)	93412	215.75	43.5	28
Closing end cap	93410	29.19	1.0	-
Debris strainer for 4" bottom knockout	93488	52.00	0.2	-
SK1 Iron longitudinal grate - 19.69" (0.5 m) (Load Class F)	96096	87.75	13.9	200
SK1 Iron slotted grate - 19.69" (0.5 m) (Load Class F)	96082	64.50	12.9	200
SK1 Iron 4-bolt grate* - 19.69" (0.5 m) (Load Class F)	99590	87.75	10.8	140

*includes 4 qty M10 bolts.

H200SK-13**SlabDrain H200SK-13 Ductile Iron Edge**

	Part No.	Price \$	Weight lbs	Pallet Qty
Constant depth channel - 39.37" (1 m)	63456	236.25	66.4	18
Closing end cap	93460	51.00	1.0	-
Debris strainer for 4" bottom knockout	93488	52.00	0.2	-
SK2 Iron longitudinal grate - 19.69" (0.5 m) (Load Class E)	72263	175.25	26.2	64
SK2 Iron slotted grate - 19.69" (0.5 m) (Load Class F)	02449	152.25	32.0	80
SK2 Iron 4-bolt grate* - 19.69" (0.5 m) (Load Class F)	99591	183.50	26.5	80

*includes 4 qty M10 bolts.

H300SK-13**SlabDrain H300SK-13 Ductile Iron Edge**

	Part No.	Price \$	Weight lbs	Pallet Qty
Constant depth channel - 39.37" (1 m)	63466	259.50	82.2	12
Closing end cap	93470	58.00	1.4	-
SK3 Iron longitudinal - 19.69" (0.5 m) (Load Class E)	96833	321.50	62.5	36
SK3 Iron slotted grate - 19.69" (0.5 m) (Load Class F)	02445	229.25	55.0	48
SK3 Iron 4-bolt grate* - 19.69" (0.5 m) (Load Class F)	99592	333.00	55.3	36

*includes 4 qty M10 bolts.

SK Grate Accessories

	Part No.	Price \$	Weight lbs	Pallet Qty
Grate removal tool	01318	29.19	0.3	-
PowerLok® safety clip (red)	10443	3.50	0.1	-
Tamper resistant bolt for 4-bolt grate	138127	12.95	0.1	-
Tamper resistant bolt driver	138128	124.50	0.1	-
Replacement bolt for 4-bolt grate	95526	3.50	0.1	-

Product Repair Materials

	Part No.	Price \$	Weight lbs	Volume
ACO Seal flexible joint polymer concrete sealant	91120	23.24	1.0	10 oz. tube
ACO Bond polymer concrete repair kit	06519	340.00	11.0	1 gal
ACO Bond polymer concrete repair kit	06516	662.50	55.0	5 gal
ACO fiberglass repair kit	08203	271.00	11.0	1 gal

ACO Terms & Conditions

PAYMENT - All pricing is in U.S. Dollars.

TERMS - Net 30 days from date of invoice. A service charge of 1.5% per month will be charged on all invoices unpaid 30 days after invoice date (equal to 18% annually).

FREIGHT - F.O.B. ACO

PRODUCT AVAILABILITY - Call Customer Service for current stock availability and lead times.

MISSING MATERIAL - Missing material must be reported to ACO's Customer Service Department within 48 hours of receipt of shipment.

DAMAGED MATERIAL - Damaged material must be noted on the bill of lading at final destination point. The receiver must file a freight claim with the carrier. ACO is not responsible for material damaged in transit.

TAXES - All State and Federal taxes are additional.

CHANGES - ACO, Inc. reserves the right to change prices, design, and materials of any products listed at any time.

RETURNS - Returned materials are subject to a 25% restocking charge. Prior return authorization (RGA) must be obtained from ACO before any material is shipped. Returned materials are subject to the following conditions:

- Items returned in a condition that does not allow for refurbish and resale will not be credited.
- Material must be returned to ACO within 30 days of receipt of RGA.
- All freight costs are the responsibility of those returning the material.
- All non-standard and fabricated material cannot be returned for credit.

MINIMUM ORDER - Minimum order is \$250.00. Orders under \$250.00 are subject to a \$50.00 handling fee.



Full ACO, Inc. Terms and Conditions of Sale

© July 2021 ACO, Inc.
Print #DR800 V.8

ACO, Inc.

Tel: (888) 490-9552
Fax: (520) 421-9899

West Sales Office
825 W. Beechcraft Street
Casa Grande, AZ 85122

Northeast Sales Office
9470 Pinecone Drive
Mentor, OH 44060

Southeast Sales Office
4211 Pleasant Road
Fort Mill, SC 29708

www.acousa.com
info@acousa.com

