

Spill Containment Curb

Polymer Concrete Build

Durable, yet lightweight, material made from polyester resin binder reinforced by mineral aggregates and fillers. Provides up to four times the compressive strength of cement concrete.

Multiple Sizes Available

12"w x 2.4"h or 24"w x 4"h curbs offer different containment capacities to suit application requirements.

Sloped Sides

Allow slow moving forklifts and vehicles to drive over the curb to access the inside of the bundled area.

Retrofit


Units are bonded to floor surface using appropriate adhesives. Ideal for new build or retrofit applications.

Interlocking End Profiles

Ensure correct alignment of units and create 3/16" gap for injection of adhesive to ensure units are fully sealed.

TYPICAL APPLICATIONS


- Car Washes
- Truck Stops
- Gas Stations
- Wash-Down Areas
- Heavy-Duty Industrial Areas

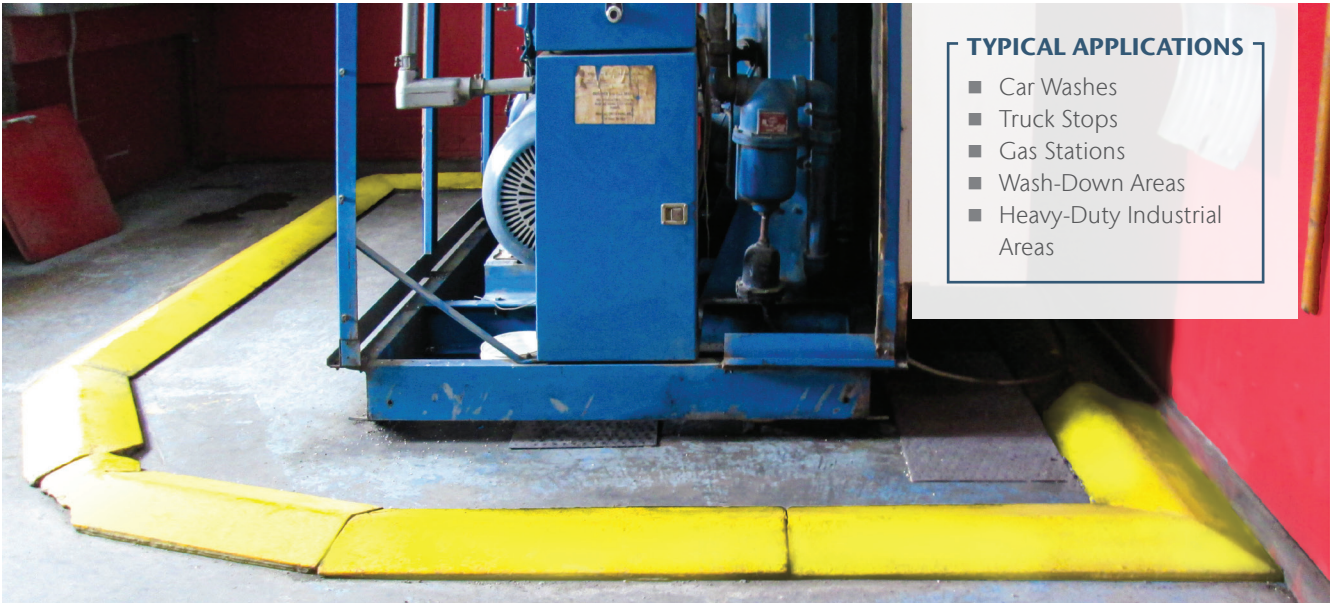

Type I Spill Containment Curb

Spill Containment Capacity (gal)


FT	5	10	15	20	25	30	35	40	45	50
5	36									
10	72	143								
15	108	215	323							
20	143	287	430	574						
25	179	358	538	717	896					
30	215	430	645	860	1075	1290				
35	251	502	753	1004	1255	1506	1756			
40	387	574	860	1147	1434	1721	2007	2294		
45	323	645	968	1290	1613	1936	2258	2581	2904	
50	358	717	1075	1434	1792	2151	2509	2868	3226	3585

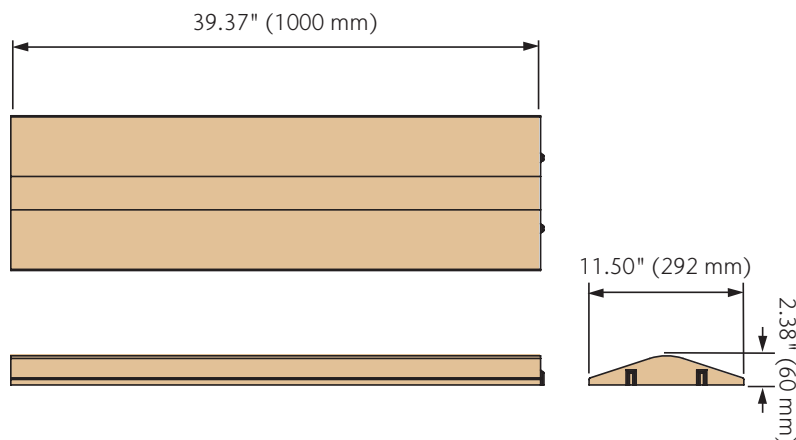

Type II Spill Containment Curb

Spill Containment Capacity (gal)

FT	5	10	15	20	25	30	35	40	45	50
5	62									
10	125	249								
15	187	374	561							
20	249	499	748	997						
25	312	623	935	1247	1559					
30	374	748	1122	1496	1870	2244				
35	436	873	1309	1746	2182	2618	3055			
40	499	997	1496	1995	2494	2992	3491	3990		
45	561	1122	1683	2244	2805	3366	3928	4489	5050	
50	623	1247	1870	2494	3117	3741	4364	4987	5611	6234

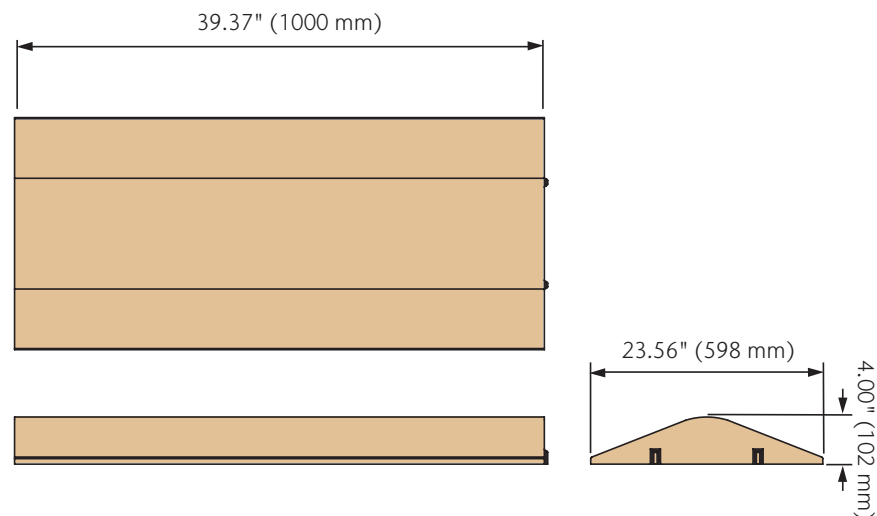

	Part No.	Height in (mm)	Length in (mm)	Width in (mm)	Wgt lbs
SPILL CONTAINMENT CURB					
Type I Curb	05730	2.30 (58)	39.40 (1000)	11.50 (292)	54.0
Type II Curb	05731	4.00 (102)	39.40 (1000)	23.50 (597)	170.0

ACO, Inc.

West Sales Office
825 W. Beechcraft Street
Casa Grande, AZ 85122
Tel: (520) 421-9988
Toll-Free: (888) 490-9552
Fax: (520) 421-9899

Northeast Sales Office
9470 Pinecone Drive
Mentor, OH 44060
Tel: (440) 639-7230
Toll-Free: (800) 543-4764
Fax: (440) 639-7235

Southeast Sales Office
4211 Pleasant Road
Fort Mill, SC 29708
Toll-Free: (800) 543-4764
Fax: (803) 802-1063

info@acousa.com
www.acousa.com

© March 2022 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice. Print #EN402

ACO. creating
the future of drainage

