

# ACO Self

## Residential & Landscape Products


HexaLine is a recyclable polypropylene trench drain system with a range of innovative features, making installation easier than ever.

The lightweight, cellular construction allows for a simple 'push-fit' of channels and accessories and makes cleaning and maintenance easy.

The wide selection of grate styles and materials make it simple to match any aesthetic and application requirements.


Suitable for pedestrian/light vehicle traffic applications such as:

- Residential driveways
- Patios
- Walkways
- Basements
- Pools

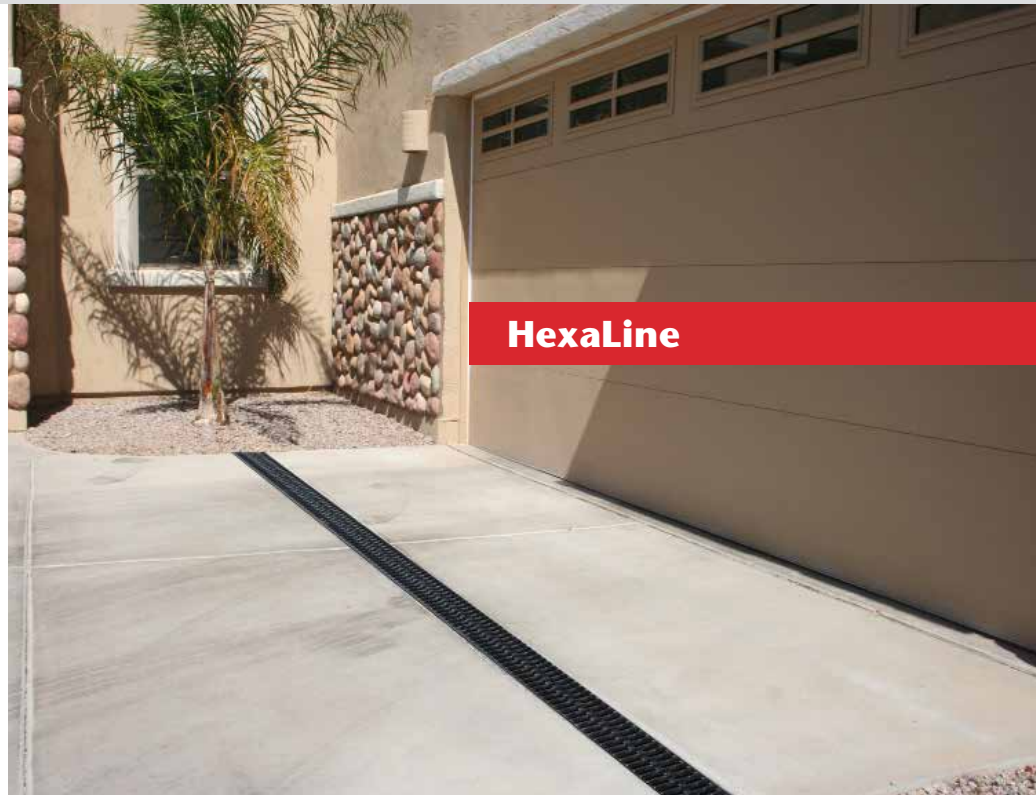

**HexaLine**

### Product Overview

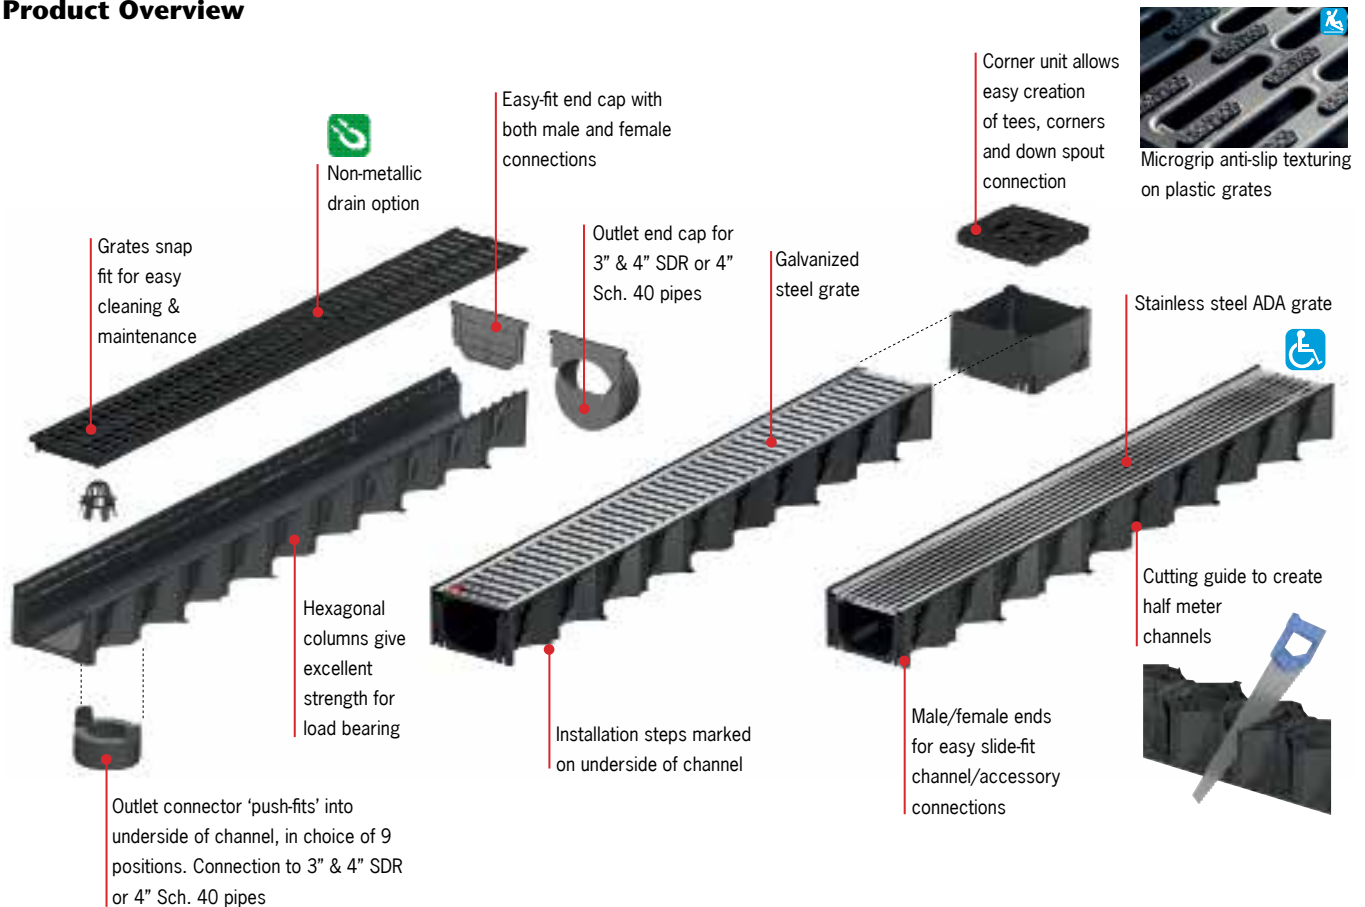

See HexaLine Brickslot for a discreet, slot drainage solution.

## Part Table

	Part No.	Length inches	Width inches	Height inches	Wgt. lbs.
HexaLine channel (1 meter)	<b>319200</b>	39.4	5.1	3.2	1.65
Galvanized steel grate (1 meter)	<b>38516</b>	39.4	5.1		2.64
Stainless steel longitudinal grate (1 meter)	<b>10323</b>	39.4	5.1		6.95
Brickslot plastic grate (0.5 meter)	<b>319554</b>	19.7	5.1		0.96
Black plastic microgrip grate (1 meter)	<b>319250</b>	39.4	5.1		1.25
Accessory pack - 2 end caps, bottom outlet & leaf guard	<b>19303</b>	-	-	-	0.4
4" outlet cap	<b>319289</b>	-	5.1	3.2	0.1
Corner unit	<b>319560</b>	5.1	5.1	3.2	0.81
Garage Pack - black microgrip plastic grates	<b>19305</b>	39.4	5.1	9.6	8.92
Garage Pack - galvanized steel grates	<b>19309</b>	39.4	5.1	9.6	8.92

## Grate Options



## Accessories

A full range of accessories are available for simple installation.

**Corner unit:**

Allows up to 4 way channel connection

**Accessory pack includes:**

- 2 - closing end caps
- 1 - bottom outlet
- 1 - leaf guard



## 10 ft Garage Pack includes:

- 1 - Accessory pack
- 1 - set of 3 HexaLine channels (10 ft)



Choose either black plastic or galvanized steel grates



## Installation Instructions



Excavate area to accommodate trench drain and 4" concrete surround.



Rough in 3" or 4" SDR pipe or 4" schedule 40 outlet pipe, compact excavation base and lay 4" deep concrete bed.



Knockout channel base for outlet and start to lay channels from outlet position.



Continue to lay channels working away from outlet, channels slide-fit together.



Pour 4" concrete around channel sides allowing for pavement detail (see section drawing above).



Finish pavement/pavers must be 1/8" higher than the grate.

For pedestrian **only** applications, trench drain can be set directly on well compacted soil. For driveway applications, trench drain **MUST** be surrounded by 4" of concrete.

## ACO Polymer Products, Inc.

**East Sales Office**

9470 Pinecone Drive  
Mentor, OH 44060  
Tel: (440) 639-7230  
Toll free: (877) 553-9961  
Fax: (440) 639-7235

**Southeast Sales Office**

4211 Pleasant Road  
Ft. Mill, SC 29708  
Toll free: (877) 553-9961  
Fax: (803) 802-1063

**West Sales Office**

825 W. Beechcraft St.  
Casa Grande, AZ 85122  
Tel: (520) 421-9988  
Toll Free: (877) 553-9961  
Fax: (520) 421-9899

**Electronic Contact**

info@acoself.com  
www.acoself.com

**Follow us on**