


PLAN

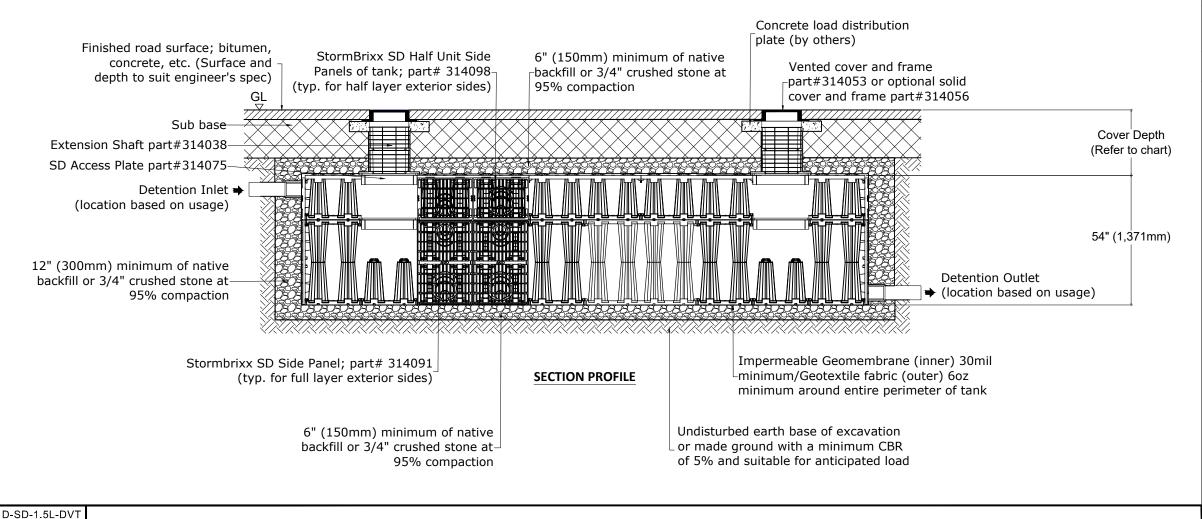

Installation depths of ACO StormBrixx SD	
Installation Location	Minimum cover depth ⁽ ft (m)
Non-trafficked areas i.e. landscaping ⁽²⁾	1.65 (0.5)
Parking lots, vehicles up to 5,512lbs gross mass ⁽¹⁾	1.8 (0.55)
Parking lots, occasional vehicles greater than 5,512lbs gross mass ⁽³⁾	2.0 (0.6)
Occasional heavy truck traffic up to HS-20 loading	Please consu with ACO
Maximum cover depth of ACO StormBrixx SD	6.5 (2)
Maximum depth to invert of ACO StormBrixx SD half layer system	12.56 (3.8)


Notes

- (1) Assumes 27 degree load distribution through fill material and overlaying surface asphalt or block paving
- (2) Minimum cover depth to avoid accidental damage from gardening/landscaping work
- (3) Occasional sanitation trucks or similar vehicles (typically one per week)
- (4) Please check minimum frost cover depths and water table heights for geographical location

ACO StormBrixx SD Half Unit Module

48"x24"x18" [1200x602.5x457mm (H)] 11.27cuft net volume per module Brick or Cross Bonded (where applicable) Part Numbers:

Tank Body-314090 & Top Cover-314094





*All systems must be designed and installed to meet or exceed ACO StormBrixx minimum requirements. Although ACO StormBrixx offers support during the design, review, and construction phases of the module system, it is the ultimate responsibility of the Engineer of Record to design the system in full compliance with all applicable engineering practices, laws, and regulations.

ACO, Inc.

825 W. Beechcraft St Casa Grande, AZ 85122 Tel: 520-421-9988 Fax: 520-421-9899

9470 Pinecone Drive Mentor, OH 44060 Tel: 440-639-7230 Fax: 440-639-7235

4211 Pleasant Rd. Fort Mill. SC 29708 Tel: 440-639-7230 Fax: 803-802-1063

DETENTION - STORMBRIXX SD 1.5 LAYERS WITH ACCESS PLATES

INSTALLATION DRAWING - ACO STORMBRIXX SD

DATE: 08/16/2019 ISSUE: D

IAICIO

Arizona Tel: 888-490-9552 e-mail: info@acousa.com Ohio Tel: 800-543-4764 WWW.ACOSTORMBRIXX.US South Carolina Tel: 800-543-4764