Access unit (may be used with catch basin and can also be used with channels)

19.69" (500mm)

DRAINAGE SLOTS

12.41"
(315.20mm)

9.00"
(228.7mm)

33.01"
(838.5mm)

4.00"
(101.6mm)

1.66"
(42.4mm)

1.66"
(42.4mm)

15.75"
(400mm)
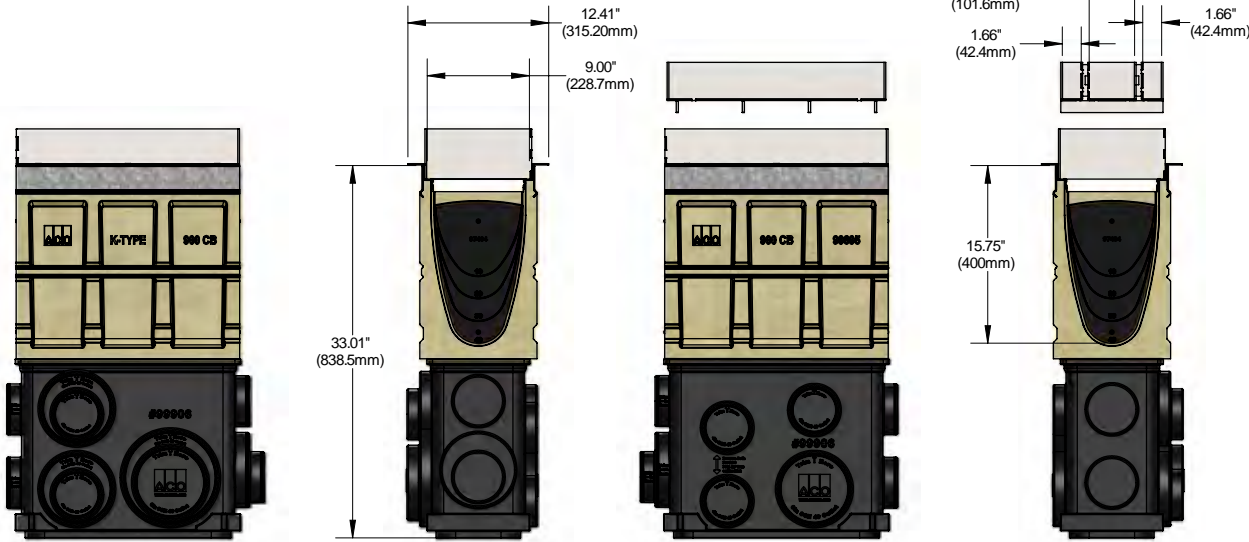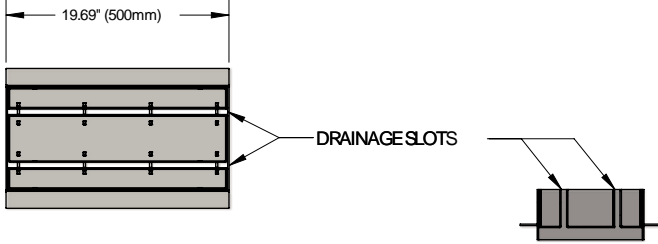
Description	Part No.	Overall Depth		Weight
		in	mm	lbs.
Type 684 Twinslot 200 Access Unit - 19.69" (0.5 m)	138067	4.45	113	32.4

Specifications

General
The surface drainage system shall be ACO Drain Brickslot, as manufactured by ACO, Inc. or equal approved.

Materials
The Brickslot top is manufactured from 11 gauge stainless steel.

The nominal clear opening for Twinslot are two ½" (12 mm) slots separated by 4" (101.6 mm) providing an overall width of 9.37" (238 mm). For use with K200, KS200, SlabDrain (H200K-13, H200KS-13), and the K200 Series 900 catch basin. See separate ACO Spec info sheet for channel details. Twinslot rests in the grate seating of the channel, the anti-shunt lugs help prevent lateral movement and the weight of covering material keeps the unit secured. Access units have frames that fit catch basins with a separate unit that can be removed for maintenance.

Installation
The trench drain system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

ACO Specification Information

SPEC INFO
ACO