



Pipe - Socket Clamp

Socket Clamp with One Part

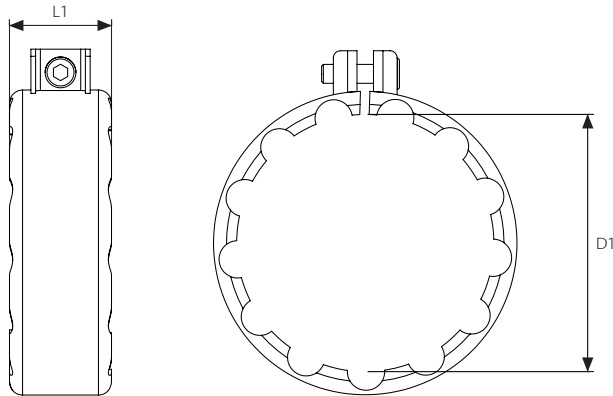


Specifications

General

Used with ACO Pipe System. Used to mechanically secure ACO push-fit piping system. Made from AISI 316L. Designed for gravity piping system with maximum working pressure of 0.5 bar. Socket clamp can increase maximum operating pressure to 0.7 bar. Only Available in metric ACO Pipe sizes listed below. ACO recommends checking local plumbing codes prior to installation. Manufactured to EN 1124-1 and 1124-2.

Socket Clamp with Two Parts

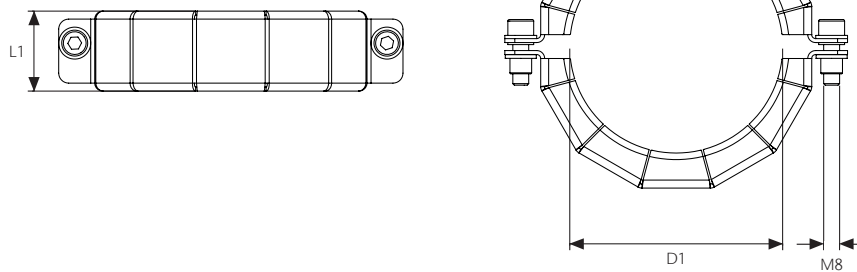

	Part No.	Length (L1) in (mm)	Diameter (D1) in (mm)	Pipe Material	Weight lbs
Socket Clamp with One Part	417067	1.58 (40)	1.97 (50)	316L	0.2
	417069	1.70 (43)	2.95 (75)	316L	0.4
	417227	1.70 (43)	4.33 (110)	316L	0.7

	Part No.	Length (L1) in (mm)	Diameter (D1) in (mm)	Pipe Material	Weight lbs
Socket Clamp with Two Parts	417397	1.42 (36)	1.57 (40)	316L	0.4
	417025	1.58 (40)	1.97 (50)	316L	0.4
	417027	1.58 (40)	2.95 (75)	316L	0.5
	417029	1.70 (43)	4.33 (110)	316L	0.6
	417017	1.78 (45)	4.92 (125)	316L	0.8
	417031	1.78 (45)	6.30 (160)	316L	1.3
	419983	1.78 (45)	7.87 (200)	316L	1.1
	417137	1.78 (45)	9.84 (250)	316L	1.6
	417219	1.89 (48)	12.40 (315)	316L	2.1

ACO, Inc.

West Sales Office info@acousa.com
 825 W. Beechcraft Street www.acousa.com
 Casa Grande, AZ 85122 www.acobuildingdrainage.us
 Tel: (520) 421-9988
 Toll-Free: (888) 490-9552
 Fax: (520) 421-9899

© March 2022 ACO, Inc.
 All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.

ACO. creating the future of drainage



ACO Specification Information