
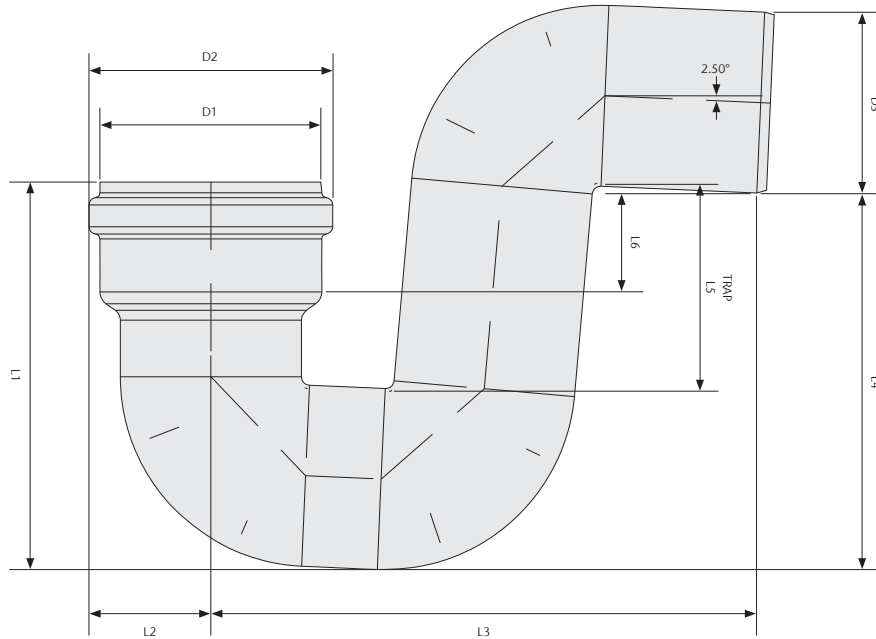


Pipe - P-Trap



Specification Clause

Used with SCH Pipe and ACO pipe. Made from AISI 316L. Rodent-proof. Non-combustible. Double-lipped seal push-fit connection. Designed for gravity piping system with maximum working pressure of 0.5 bar. Socket Clamps, FPM and NBR gasket material also available upon request in certain sizes. Socket clamp can increase maximum operating pressure. Manufactured to EN 1124-1 and 1124-2.

ACO recommends checking local plumbing codes prior to installation.

Parts	Part No.	Diameter (D1) in (mm)	Diameter (D2) in (mm)	Diameter (D3) in (mm)	Length (L1) in (mm)	Length (L2) in (mm)	Length (L3) in (mm)	Length (L4) in (mm)	Length (L5) in (mm)	Length (L6) in (mm)	Material	Gasket Material	Weight lbs
Pipe 50mm (2")	<b>417487</b>	2.375 (60.3 O.D.)	2.83 (72)	1.97 (50)	5.12 (130)	1.42 (36)	7.52 (191)	4.87 (124)	3.08 (78)	1.15 (29)	AISI 316L	EPDM	1.3
Pipe 75mm (3")	<b>417488</b>	3.50 (88.9 O.D.)	3.97 (101)	2.95 (75)	6.32 (160)	1.99 (50)	8.90 (226)	6.14 (156)	3.38 (86)	1.61 (41)	AISI 316L	EPDM	2.4
Pipe 110mm (4")	<b>417489</b>	4.50 (114.3 O.D.)	5.09 (129)	4.33 (110)	8.39 (152)	2.55 (65)	11.73 (298)	7.87 (200)	3.74 (95)	2.05 (52)	AISI 316L	EPDM	4.2
Pipe 160mm (6")	<b>417490</b>	6.625 (168.3 O.D.)	7.30 (185)	6.30 (160)	11.21 (285)	3.65 (93)	15.57 (395)	10.17 (258)	4.12 (105)	1.93 (49)	AISI 316L	EPDM	10.9
Pipe 200mm (8")	<b>TBD</b>	8.625 (219.1 O.D.)	9.37 (238)	7.87 (200)	15.24 (387)	4.69 (119)	19.51 (496)	12.71 (323)	5.11 (130)	0.90 (23)	AISI 316L	EPDM	15.2

Parts	Part No.	Diameter (D1) in (mm)	Diameter (D2) in (mm)	Diameter (D3) in (mm)	Length (L1) in (mm)	Length (L2) in (mm)	Length (L3) in (mm)	Length (L4) in (mm)	Length (L5) in (mm)	Length (L6) in (mm)	Material	Gasket Material	Weight lbs
Pipe 50mm (2")	<b>98872</b>	1.97 (50)	2.83 (72)	1.97 (50)	4.45 (113)	1.22 (31)	7.65 (194)	5.28 (134)	3.48 (88)	2.64 (67)	AISI 316L	EPDM	1.1
Pipe 75mm (3")	<b>98874</b>	2.95 (75)	3.43 (87)	2.95 (75)	6.63 (143)	1.73 (44)	9.13 (232)	6.30 (160)	3.46 (88)	2.80 (71)	AISI 316L	EPDM	2.2
Pipe 110mm (4")	<b>98876</b>	4.33 (110)	4.92 (125)	4.33 (110)	7.4 (188)	2.48 (63)	11.69 (297)	7.95 (202)	3.78 (96)	2.87 (73)	AISI 316L	EPDM	3.9
Pipe 160mm (6")	<b>98878</b>	6.30 (160)	7.00 (178)	6.29 (160)	9.84 (250)	3.50 (89)	15.67 (398)	10.35 (263)	4.25 (108)	3.35 (85)	AISI 316L	EPDM	10.2

ACO, Inc.

West Sales Office  
 825 W. Beechcraft Street  
 Casa Grande, AZ 85122  
 Tel: (520) 421-9988  
 Toll-Free: (888) 490-9552  
 Fax: (520) 421-9899

info@acousa.com  
 www.acousa.com  
 www.acobuildingdrainage.us

© March 2022 ACO, Inc.  
 All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.

ACO. creating the future of drainage



ACO Specification Information